

## General information

PWS6220260509

The weight transmitter AST 3P is a BLH NOBEL weighing instrument that guarantees high performance. It has been designed for applications with strain gage transducers that can convert the output of connected load cells into a very stable signal suitable for PC or PLC. The set up procedure and the calibration of the AST 3P BLH NOBEL weighing instrument are easy to set up. ART 3P may also have 2 digital inputs as optionals (24 Vdc/ac 6mA).




All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PWS6220260509

|                                     |  |
|-------------------------------------|--|
| <b>Full scale non-Linearity:</b>    | < 0.005 %  |
| <b>Display:</b>                     | LCD display with backlight 2 x 16 character                  |
| <b>Internal Resolution:</b>         | 8300000 counts   |
| <b>Temperature range:</b>           | -10 ÷ +50 °C   |
| <b>Storage temperature:</b>         | - 25°C ÷ + 85°C  |
| <b>Filter:</b>                      | 0.05 ÷ 75 Hz   |
| <b>Rated output RO:</b>             | ±3.3 mV/V  |
| <b>Serial port:</b>                 | RS485 2 or 4 isolated wires 500 V                            |
| <b>Analog optional output:</b>      | Isolated 16-bit bipolar D/A converter                        |
| <b>Analog output Non-Linearity:</b> | < 0.01 %   |
| <b>Power supply:</b>                | 24 Vcc ±20%  |
| <b>Maximum supply voltage:</b>      | 8.8 ÷ 5.5 Vdc (1 ÷ 8 transducers 350 Ohm, isolated 500V)     |
| <b>Conversion speed:</b>            | 0.5 ÷ 300Hz, accuracy 0.015 %                                |
| <b>Fieldbus:</b>                    | Modbus RTU or ASCII  |
| <b>Baud rate:</b>                   | < 115.2 kbaud  |
| <b>Analog output current:</b>       | 0-20mA, ±20mA, 4-20mA, 12-20mA                               |
| <b>Analog output offset drift:</b>  | < 0.35 mV/°C - < 0.7 micro A/°C                              |
| <b>Analog output Load Data:</b>     | min 500 Ohm, max 500 Ohm                                     |
| <b>Analog output voltage:</b>       | 0-10 or ±10 Vdc  |
| <b>Analog output Gain Drift:</b>    | < 0.003 % full scale/°C                                      |
| <b>Analog output Accuracy:</b>      | 0.04 %   |
| <b>Isolation:</b>                   | Digital inputs common with power supply. Other parts - 500 V |
| <b>Gain drift:</b>                  | < 0.0015 % Full scale  |
| <b>Offset drift:</b>                | < 0.04 microV/°C   |
| <b>Power consumption:</b>           | 7W   |

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

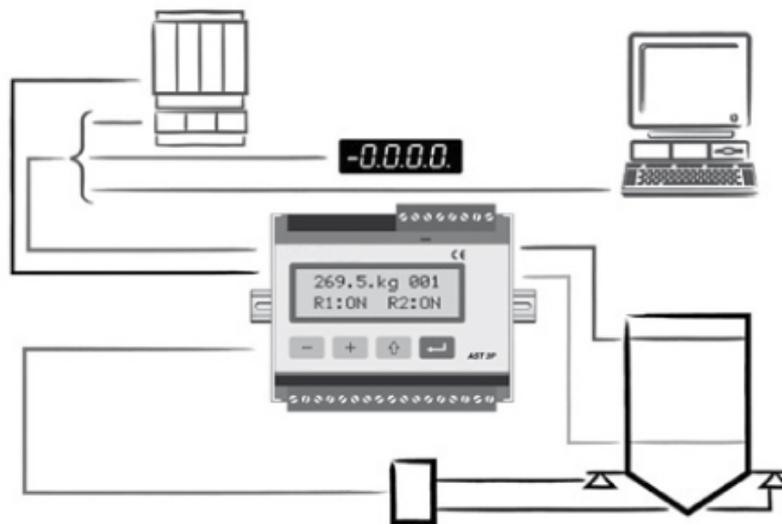

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).