


## General information

PWS15820250528

The HT cable is an accessory tool designed by Pavone Sistemi for weighing systems and connections within them. Teflon PFA cables, created with materials that guarantee safety and prevention, are robust, efficient, 100% reliable and safe. The HT cable is particularly suitable in working environments where temperatures are very high.

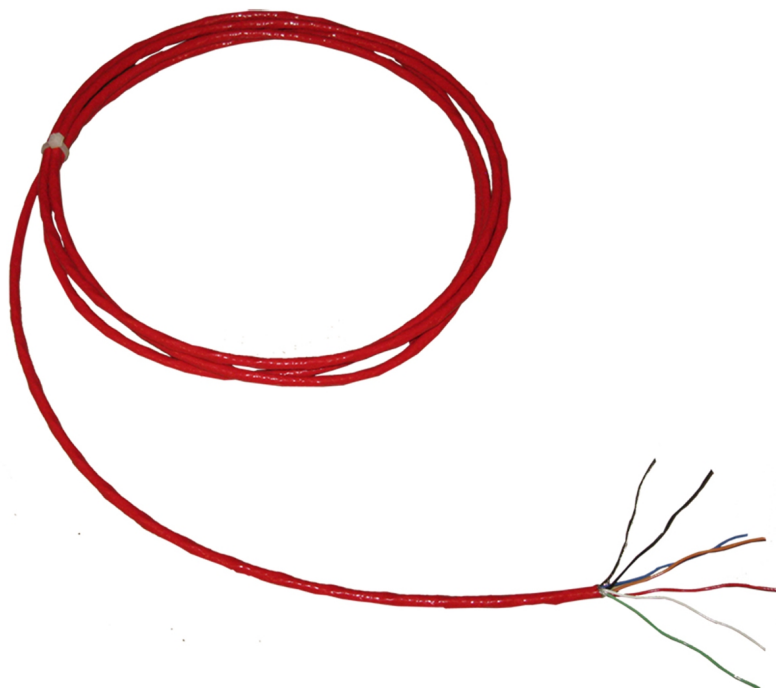

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PWS15820250528

<b>Operating temperature:</b>	from -70 °C to +260 °C (in fixed installation)
<b>Standards:</b>	CEI 20.35 - CEI 20.22 (flame retardant test)
<b>Inductance:</b>	$\leq 0,8$ mH/km
<b>Mutual capacitance:</b>	$\leq 80$ nF/km
<b>Insulation resistance:</b>	$\geq 2000$ Megaohm x km @ 20°C
<b>Electrical resistance:</b>	$\leq 58.8$ Ohm/km @ 20°C
<b>Operating voltage:</b>	600 V (maximum)
<b>Testing voltage:</b>	2000 V a.c. for 5' (core - core) / 1000 V a.c. for 1' (core - shield)
<b>Bending radius:</b>	cable diameter x 6 (in fixed installation)
<b>Weight:</b>	65 kg/km (nominal)
<b>Diameter:</b>	(6,1 $\pm$ 0,5) mm
<b>Sheath colour:</b>	red
<b>Sheath:</b>	fluoropolymer PFA type (thickness $\geq 0,4$ mm)
<b>Shield:</b>	nickel-plated copper wires braid (wire diameter 0,125 mm, density of coverage $\geq 85\%$ )
<b>Wrapping:</b>	by polyester tape helically wound (thickness 0,020 mm)
<b>Cores colour:</b>	red-orange, black-blue, green-white (paired cable assembled)
<b>Insulation:</b>	fluoropolymer PFA type (diameter 1,25 mm)
<b>Conductors:</b>	flexible nickel-plated copper wires 11 x 0,2 mm

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).