Gateway 300 **GATEWAY 300**

available with certification • UL

Technical specifications

PWS14420261119


Gateway 300 is an accessory tool that allows you to transfer data of weight, pressure and force, detected by the sensors connected to our instruments. Thanks to the architecture of the internal hardware and software, the device can be configured according to the needs required by specific applications. Gateway 300 is mounted on a DIN rail and guarantees high reliability at low cost.

Degree of protection:	IP20
Temperature range:	-5 ÷ +55°C (max umidity 95%)
Serial port:	RS232, RS422, RS485
Power supply:	24 Vdc ±10 %
Data storage:	512 byte data input and 512 byte data output
Dimensions:	27x75x120 mm (LxHxP)
Fieldbus:	Profibus-DP, Devicenet, CANopen, Modbus TCP, Modbus Plus, Modbus RTU, Profinet, Ethernet / IP, CC-Link, EherCAT, FIPIO, Interbus
Power consumption:	max 280 mA, avg. 100 mA



All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).


PAVONE SISTEMI S.R.L.
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
T (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963

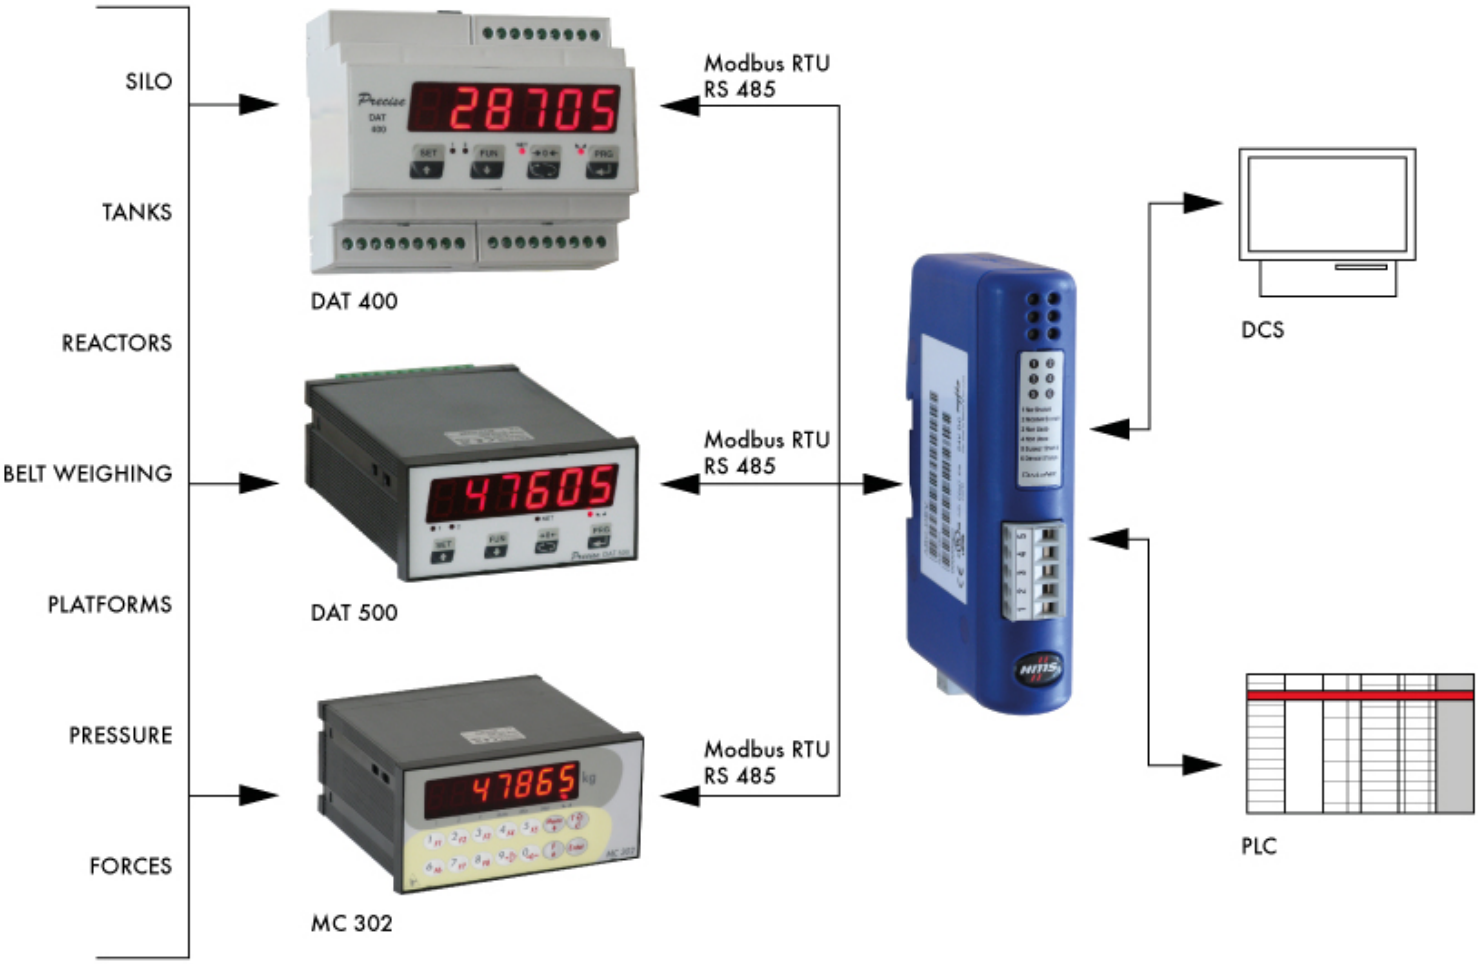

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Gateway 300 **GATEWAY 300**

available with certification • UL

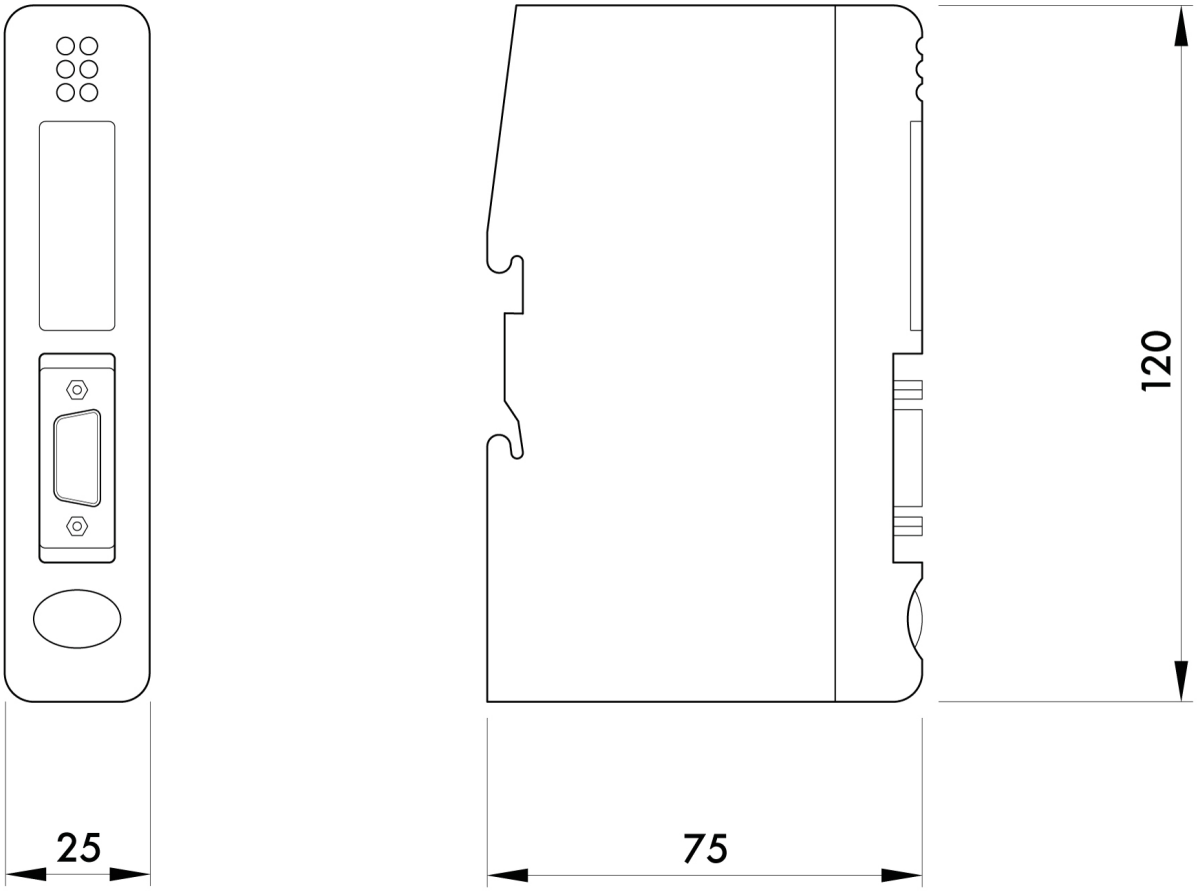

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

PAVONE SISTEMI S.R.L.
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
T (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963