


Technical specifications

PWS18520250520


The JB4-UC DIN junction box allows the collection of information from different cells. Its use is indicated where there are more than 2 load cells. It is equipped with a central connector that collects all the signals and sends them to the transmitter. In function with our product tester 1008 it is possible to receive real time information on the conditions, the problems and the functioning of the single cells.

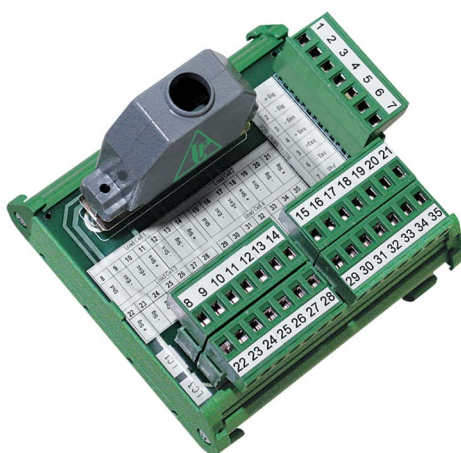

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Junction Box **JB4-UC DIN**



available with certification • UL • EAC

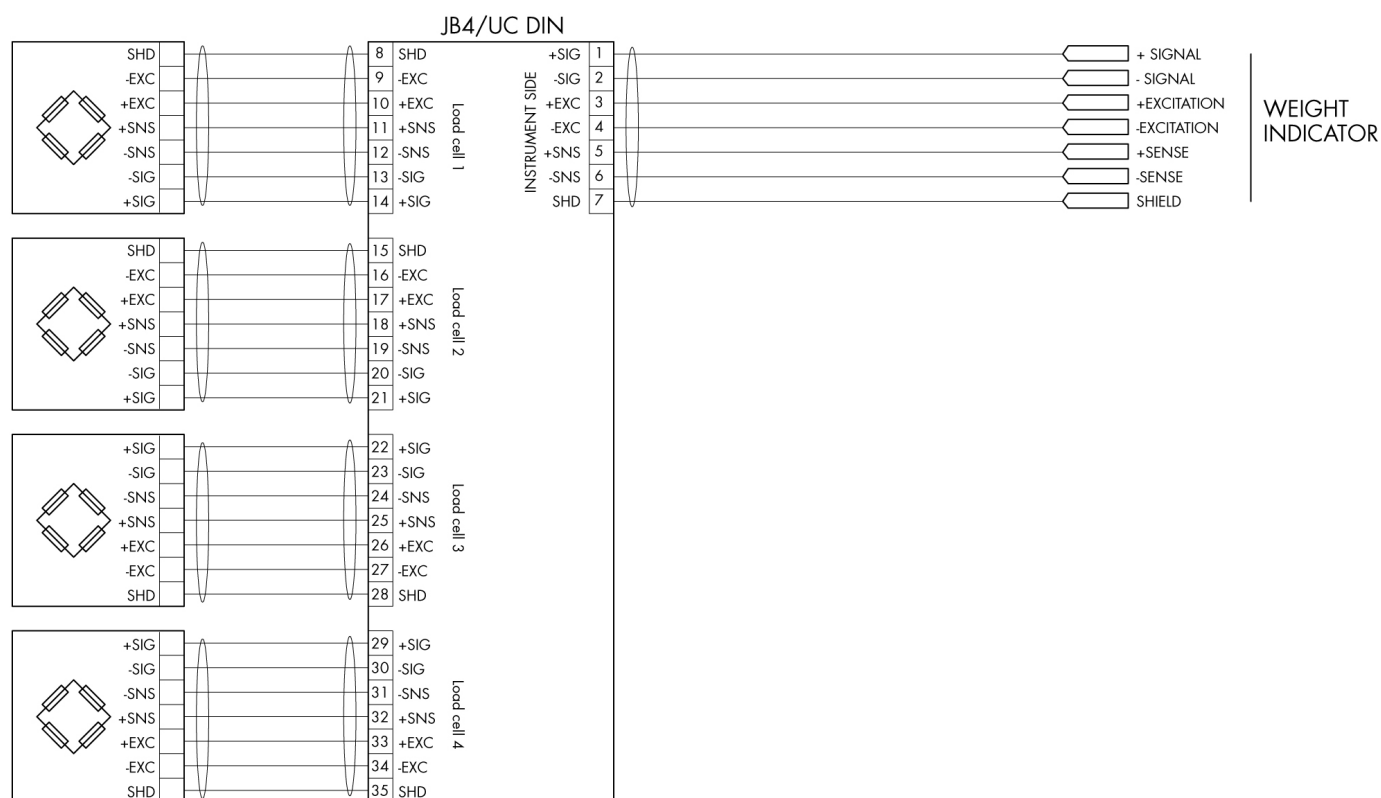

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Junction Box **JB4-UC DIN**

available with certification • UL • EAC

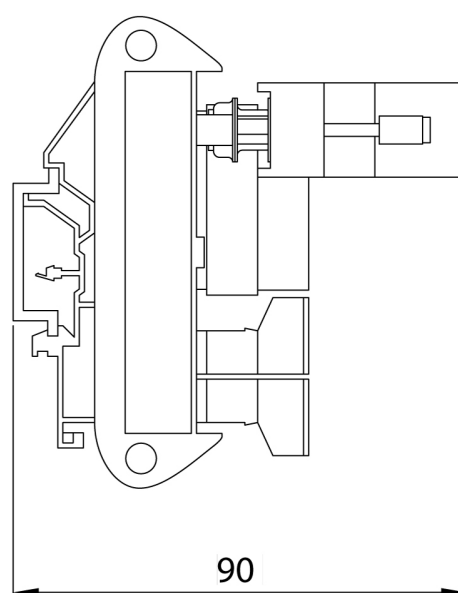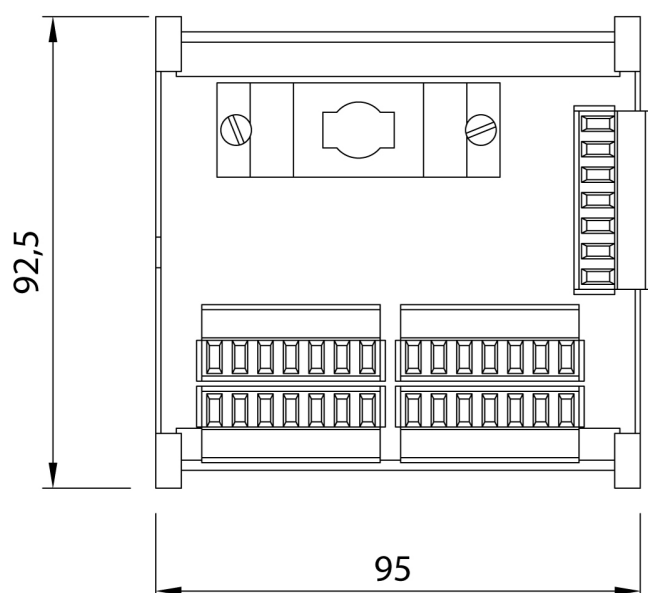

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).