


## General information

PWS37220260509

The brand new EL5 weight transmitter can be used in any industrial weighing system with the purpose of regulation and supervision. Practical, fast, flexible, suitable for systems up to 8 load cells. The EL5 weight transmitter can be configured via PC using dedicated software or directly from the Master via the communication protocol used. Main functions: field and remote fault diagnostics, emulation function of the faulty cell with exclusion from the weighing system and automatic recalibration of the new load cell. It is the natural evolution of the E LINK 3000 weighing instrument. It has two serial inputs: COM1: RS232 for configuring parameters from PC and COM2: RS485 with Modbus RTU or Fieldbus protocol (Profinet, Profibus, Canopen, Ethernet IP and classic Ethernet ). EL5 has extractable terminal blocks for electrical connection to load cells. Value for quality, performance, price, simply incredible. A real must have for all weighing systems.

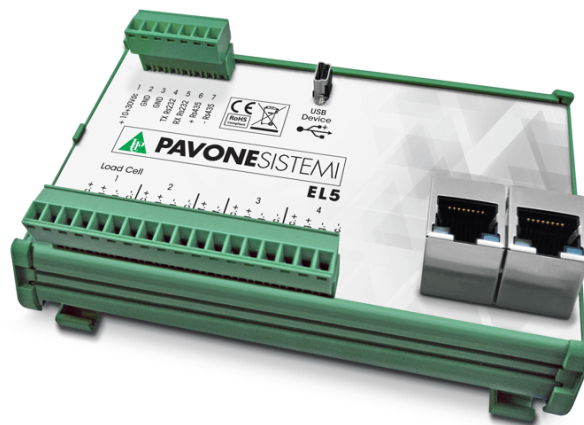

Technical Manual: [el5\\_technical\\_manual.pdf](#)

Software Optimization 1.11.22: [optimization\\_weighing\\_software.zip](#)

Ethernet IP EDS file (NIC50): [ethernet\\_ip\\_nic50\\_eds.zip](#)

Ethernet IP EDS file (NETX90): [ethernet\\_ip\\_netx90\\_eds.zip](#)

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PWS37220260509

<b>Transducer input voltage:</b>	5 Vcc (max 16 load cells 350 Ohm, in total)
<b>Measuring range:</b>	-3.9 mV/V ÷ +3.9 mV/V
<b>Input sensitivity:</b>	0.02 ?V min
<b>Output linearity:</b>	< 0.01% FS
<b>Gain drift:</b>	< 0.0003% FS / °C
<b>A/D Converter:</b>	24 bit
<b>Internal Resolution:</b>	> than 8.000,000 divisions
<b>Frequency signal acquisition:</b>	25 ÷ 400 Hz (4 load cells)
<b>Filter:</b>	Selectable from 0.25 Hz to 25 Hz
<b>Power supply:</b>	12-24 Vcc ± 15% - absorbed power 3 W
<b>Isolation:</b>	Class III
<b>Installation category:</b>	Cat. II
<b>Temperature range:</b>	-10 / +50 °C (max humidity 85% without mist)
<b>Storage temperature:</b>	-20 / +70 °C
<b>Serial port:</b>	1 USB device + 1 RS232C
<b>Available fieldbusses:</b>	ETHERNET IP
<b>Microcontroller:</b>	32 bit ARM Cortex M0+, 128KB Flash reprogrammable on- board from USB
<b>Data storage:</b>	4 Kbytes
<b>Regulatory compliance:</b>	EN61000-6-2, EN61000-6-3 per EMC; EN61010-1 for electrical safety
<b>Electrical connection:</b>	Removable screw terminal, 3.81 mm pitch
<b>Dimensions:</b>	134 x 90 x 40 mm (L x H x P)
<b>Mounting type:</b>	Fixing with 4 screws or on support for DIN bar or OMEGA bar

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).