

## General information

PWS24020260210

The GD 4 Compression Load Cell has been designed for working in harsh environments. The GD 4 cell is a tailor-made product, designed and built according to the specific needs of the customer.



## Suggested related products

A highly performing weighing system must be accurate, perfectly calibrated and well maintained. In order to improve the load cell performance and to optimize its functioning, you may need the following products:

**Weight Transmitter DAT 1400**

**Tester 1008 TESTER 1008**

**Double Shear Beam Load Cell DDR**

**Shear beam load cells SBR**


All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PWS24020260210

<b>Rated load (RL):</b>	500, 1.000, 2.500, 5.000, 10.000, 20.000 kg
<b>Combined error:</b>	±0,05 % RO
<b>Repeatability:</b>	±0,03 % RO
<b>Creep (30 minutes):</b>	±0,03 % RO
<b>Safe overload:</b>	150 % RL
<b>Ultimate overload:</b>	300 % RL
<b>Material:</b>	Stainless steel
<b>Degree of protection:</b>	IP65
<b>Compensated Temperature:</b>	-10 ÷ +40 °C
<b>Temperature range:</b>	-20 ÷ +70°C
<b>Temperature effect on zero balance:</b>	±0,003 % RO/°C
<b>Temperature effect on output:</b>	±0,002 % output/°C
<b>Rated output RO:</b>	2 mV/V ±0,1%
<b>Zero balance:</b>	±1 % RO
<b>Insulation resistance:</b>	> 2000 MOhm
<b>Input resistance:</b>	700 ÷ 710 Ohm
<b>Output resistance:</b>	700 ÷ 705 Ohm
<b>Recommended input:</b>	5 ÷ 15 Vdc/ac
<b>Cable Length:</b>	5, 10, 20 m

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).

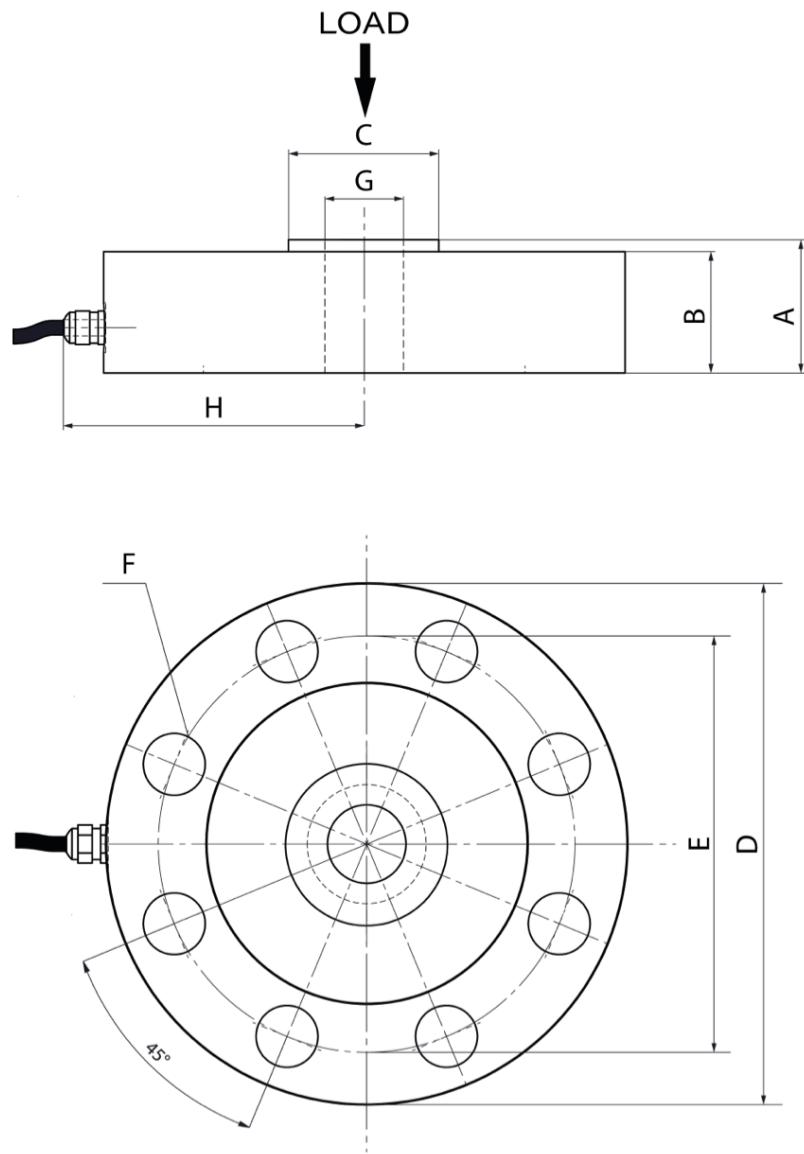

Load	A	B	C	D	E	F	G	H
500 Kg	30	28	38	101	86	N°8 - Ø8,5	M20 x 1,5	65
1 t	30	28	38	101	86	N°8 - Ø8,5	M20 x 1,5	65
2,5 t	30	28	38	101	86	N°8 - Ø8,5	M20 x 1,5	65
5 t	30	28	38	101	86	N°8 - Ø8,5	M20 x 1,5	65
10 t	40	39	50	150	126	N°12 - Ø10,5	M30 x 1,5	85
20 t	40	39	50	150	126	N°12 - Ø10,5	M30 x 1,5	85

**Electrical Connection**

+Supply	Red
-Supply	Black
+Signal	Green
-Signal	White
+Rif	Orange
-Rif	Blue

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).