

General information

PWS4020260507

The off center load cell CB17 has low capacity and high precision at a competitive price and is particularly suitable for the construction of small scales, in fact it has a capacity ranging from 0.6 to 3 kg and the maximum dimensions of the plate are equal at 200 x 200 mm. Furthermore, the CB17 cell is equipped with a 4-conductor cable 40 cm long.



Suggested related products

A highly performing weighing system must be accurate, perfectly calibrated and well maintained. In order to improve the load cell performance and to optimize its functioning, you may need the following products:

Weight Transmitter [UWT 6008](#)

Weight Transmitter [DAT 1400](#)

Weight Indicator [MCT 1302](#)

Tester 1008 [TESTER 1008](#)

Off Center load cell [C2G1](#)

Junction Box [CGS4-C](#)

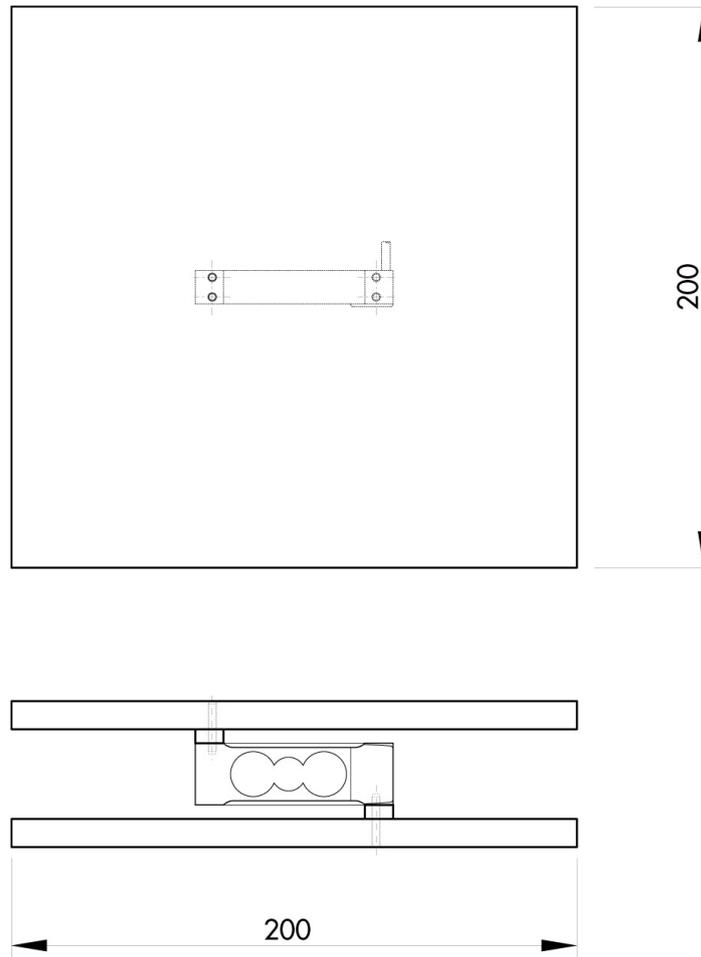
All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Technical specifications

PWS4020260507

Rated load (RL):	0.6, 1, 2, 3 Kg
Combined error:	±0.03 % RO
Repeatability:	< ±0.02 % RO
Creep (20 minutes):	< ±0.02 % RO
Full scale non-Linearity:	< ±0.02 % RO
Safe overload:	300 % RL
Ultimate overload:	400 % RL
Material:	Alluminum alloy
Degree of protection:	IP64
Compensated Temperature:	-10 ÷ +50 °C
Temperature range:	-10 ÷ +50 °C
Temperature effect on zero balance:	< ±0.004 % RO/°C
Temperature effect on output:	< ±0.0012 % on output/°C
Rated output RO:	1.0 ±0.1 mV/V
Zero balance:	±0.05 mV/V
Insulation resistance:	> 2000 MOhm
Input resistance:	420
Output resistance:	350 ±5 Ohm
Recommended input:	5 ÷ 12 Vdc/Vac
Maximum supply voltage:	15 Vdc/ac

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).

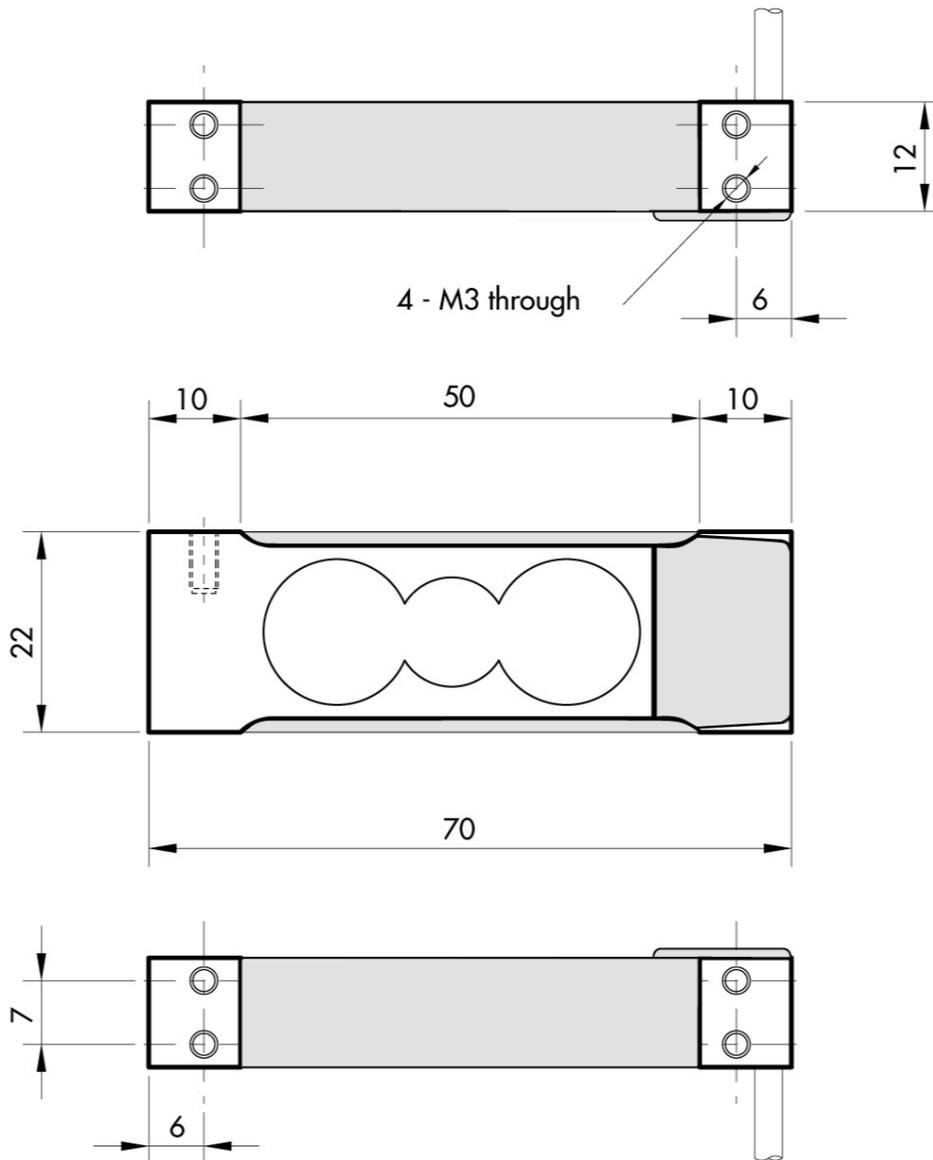

Electrical Connection

+Excitation	Red
-Excitation	White
+Signal	Green
-Signal	Blue
Shield	Cable shield

To Know

Error is within 0.02% SN applied with 1/2 of capacity at the position of 50mm of eccentricity
 The center of loading plate and the center of the load cell should be the same position

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).



All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).