

## General information

PWS34820260616

The Model 1042 is a low profile single-point load cell designed for direct mounting in weighing platforms. Its small physical size, combined with high accuracy and low cost, makes this load cell ideally suited for retail, bench and counting scales. Capacities of 5 kg and above are supplied as standard in anodized aluminum. This high accuracy load cell is approved to NTEP and other stringent approval standards, including OIML R60. A humidity resistant protective coating assures long-term stability over the entire compensated temperature range. The two additional sense wires feed back the voltage reaching the load cell. Complete compensation of changes in lead resistance due to temperature change and/or cable extension, is achieved by feeding this voltage into the appropriate electronics.



## Suggested related products

A highly performing weighing system must be accurate, perfectly calibrated and well maintained. In order to improve the load cell performance and to optimize its functioning, you may need the following products:

**Weight Transmitter** [DAT 1400](#)

**Weight Indicator** [MCT 1302](#)

**Tester 1008** [TESTER 1008](#)

**Junction Box** [CGS4-C](#)

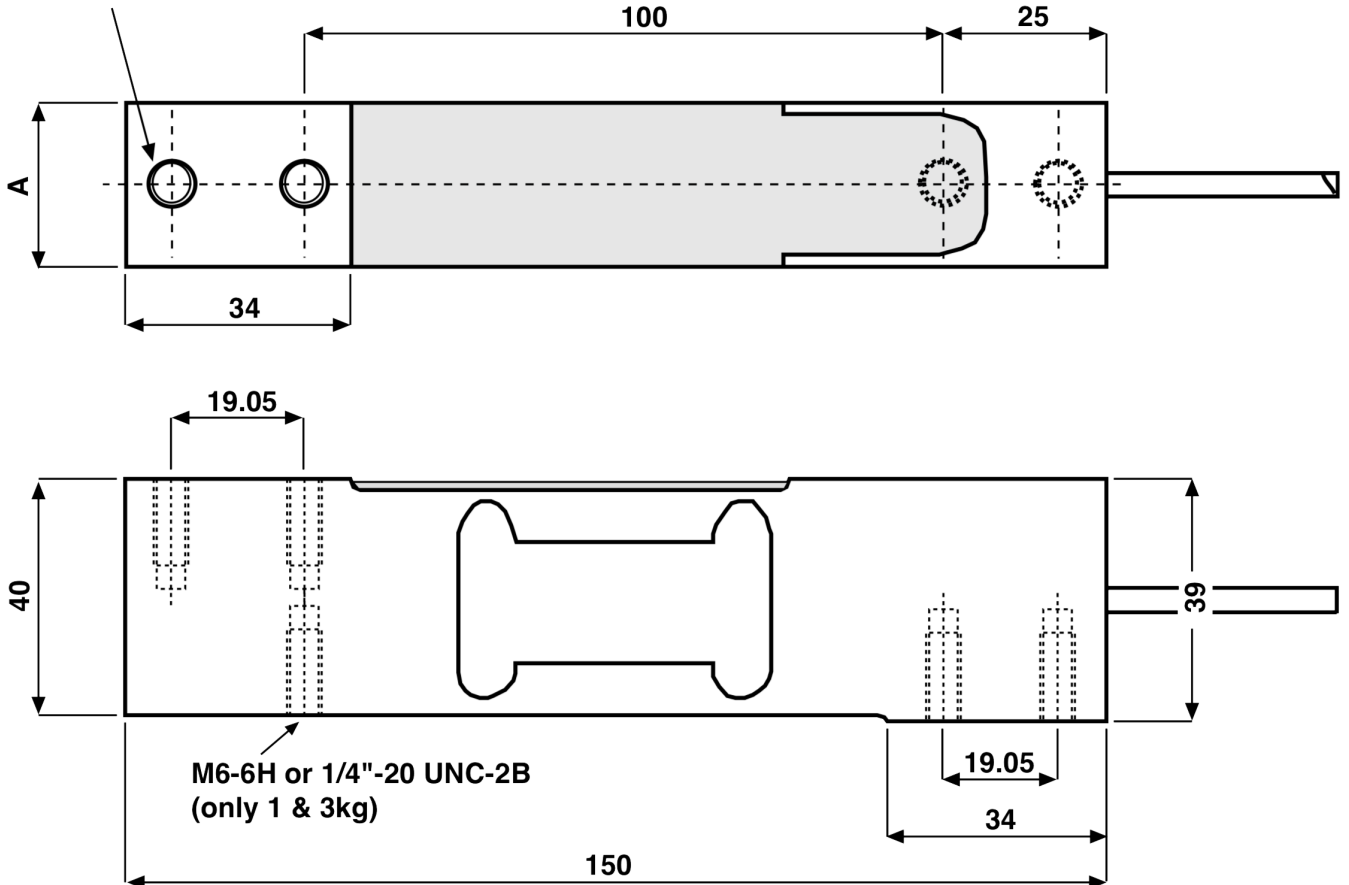
All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PWS34820260616

<b>Rated Load (RL):</b>	1*, 3, 5, 7, 10, 15, 20, 30, 50, 75, 100, 150**, 200* ** kg * no OIML; ** no NTEP
<b>Ultimate overload:</b>	300 % RL
<b>Material:</b>	Plated (anodize) aluminium
<b>Degree of protection:</b>	IP66
<b>Compensated Temperature:</b>	-10 ÷ +40°C
<b>Temperature range:</b>	-30 ÷ +70°C
<b>Temperature effect on zero balance:</b>	±0.0014 % (NTEP); ±0.0100 % (Non Approved); ±0.0023 % (C3); ±0.0014 % (C6); RO/°C
<b>Temperature effect on output:</b>	±0.0010 % (NTEP); ±0.0030 % (Non Approved); ±0.0010 % (C3); ±0.00058 % (C6); RO/°C
<b>Rated output RO:</b>	2 mV/V
<b>Zero balance:</b>	±0.20 mV/V
<b>Insulation resistance:</b>	> 2000 MOhm
<b>Input impedance:</b>	415±20 Ohm
<b>Maximum input voltage:</b>	15 Vdc or Vac rms
<b>Nominal input voltage:</b>	10 Vdc or Vac rms
<b>Cable Length:</b>	1 m
<b>Load plan:</b>	400x400
<b>Output impedance:</b>	350±3 Ohm

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

**4 Mounting holes**  
**M6-6H or 1/4"-20 UNC-2B**

**Wiring Schematic Diagram**
**BALANCED & UNBALANCED BRIDGE CONFIGURATION**

+VE INPUT	Green
+VE SENSE	Blue
+VE OUTPUT	Red
-INPUT	Black
-VE SENSE	Brown
-OUTPUT	White

**CAPACITY**
**A**

1 - 30 kg	20
50 - 200 kg	25.4

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).