

## General information

PWS25420260707

The S-type load cell PS036 is a robust tension and compression load cell covered by an anti-corrosion. The traction load cell PS036 can be applied in different industrial environments for several applications: weighing of suspended loads, plants for the production of cement and tar, measurement of forces and dynamometers.




All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PWS25420260707

<b>Rated load (RL):</b>	50, 100, 250, 500, 1000, 2500 Kg
<b>Combined error:</b>	< $\pm 0.017$ % Full scale
<b>Repeatability:</b>	< $\pm 0.015$ % full scale
<b>Creep (30 minutes):</b>	< $\pm 0.016$ % Full scale
<b>Safe overload:</b>	300 % RL
<b>Accuracy class:</b>	3000 OIML
<b>Deflection:</b>	0.3 - 0.5 mm
<b>Compensated Temperature:</b>	-10 ÷ +40 °C
<b>Temperature range:</b>	-30 ÷ +70 °C
<b>Temperature effect on zero balance:</b>	< $\pm 0.01$ % full scale/5°K
<b>Rated output RO:</b>	2 mV/V $\pm 0.1$ %
<b>Insulation resistance:</b>	> 5000 MOhm
<b>Input impedance:</b>	400 $\pm 20$ Ohm
<b>Maximum input voltage:</b>	15 V
<b>Nominal input voltage:</b>	10 V
<b>Output impedance:</b>	350 $\pm 3$ Ohm
<b>Temperature effect on rated output:</b>	< $\pm 0.006$ % full scale/5°K

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

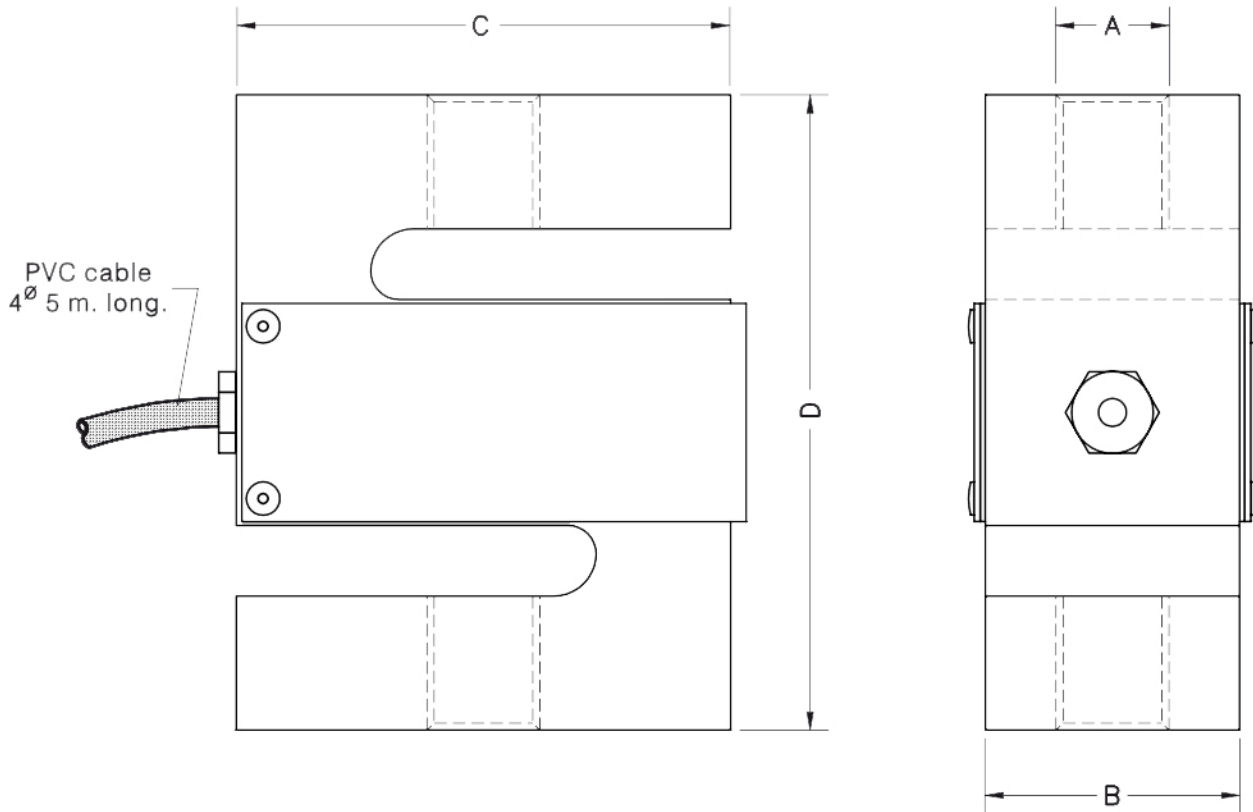

CAPACITY	A	B	C	D	TRANSPORT WEIGHT
50÷100kg	M8x1.25	15	50.8	63.5	0.4kg
250÷500÷1000kg	M12x1.25	19	50.8	76.2	0.6kg
2500kg	M20x1.5	25.4	76.2	108	1.3kg

**Electrical Connection**

+IN	Green
+OUT	Red
-IN	Black
-OUT	White

Shield

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).