

Technical specifications

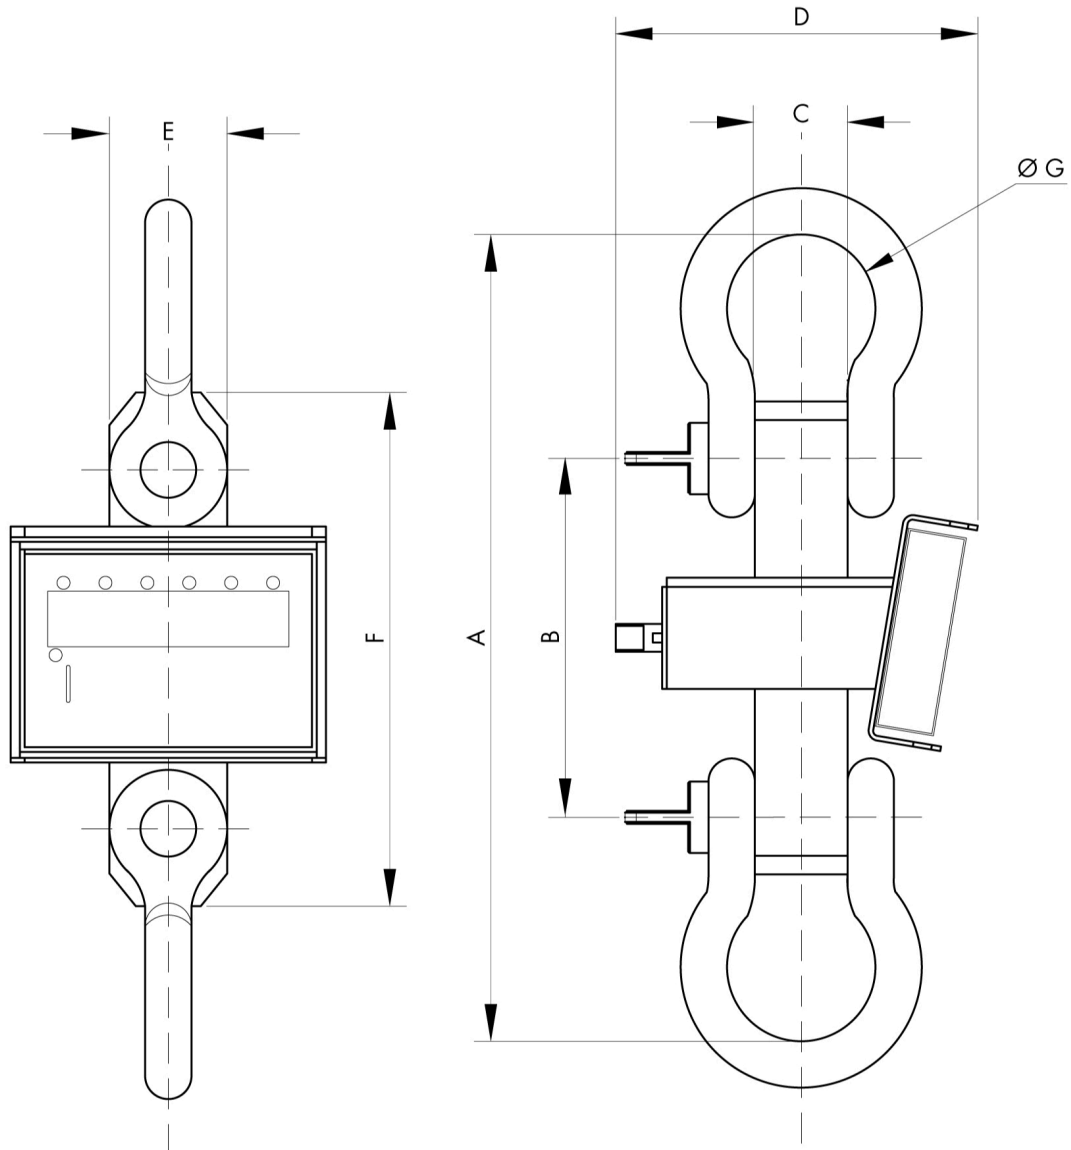
PWS9720260617

The CS09 product is an ideal dynamometer for weighing very heavy suspended loads, equipped with a weight indicator display and equipped with wi-fi technology to communicate in real time with remote devices. The CS09 weight indicator is made of stainless steel, the calibration takes place digitally and is prearranged for PC connection or with remote indicator and printer. There are different versions of CS09, which can be customized according to customer's needs.

| | |
|------------------------------|---|
| Display: | 40 mm, DOT red LED |
| Degree of protection: | IP67 |
| Temperature range: | -10 ÷ +40°C |
| Filter: | digital and programmable |
| Calibration: | Programmable by keyboard or computer |
| Accuracy full scale: | 3 t ÷ 9 t: ±0.05 % full scale; 12 t ÷ 50 t: ±0.1 % full scale |
| Charger: | Rechargeable battery. Charger 230 Vac 50 Hz |

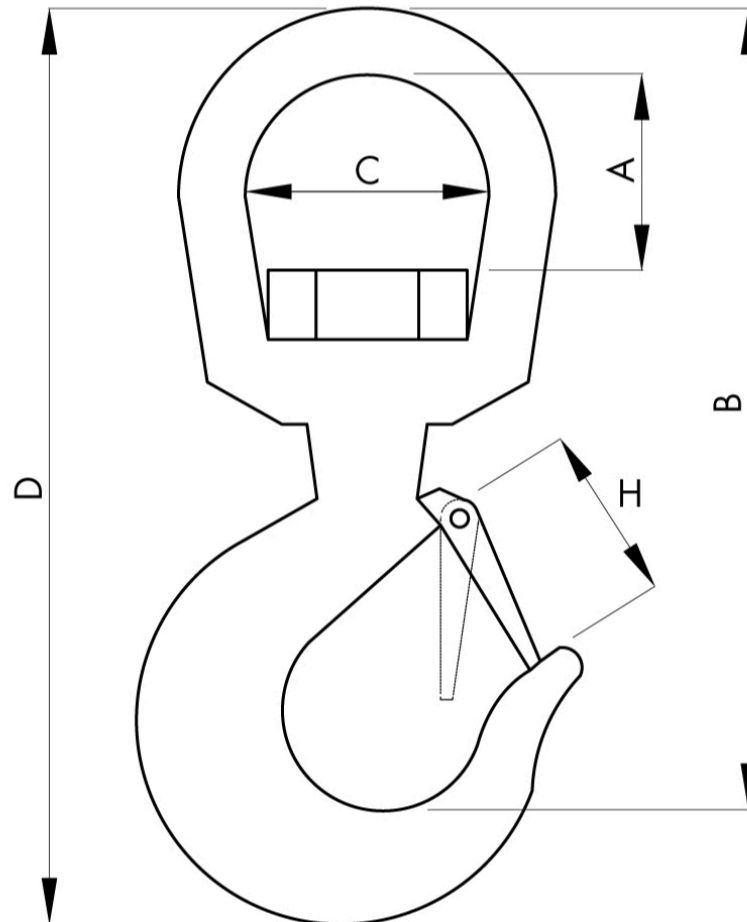


All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).



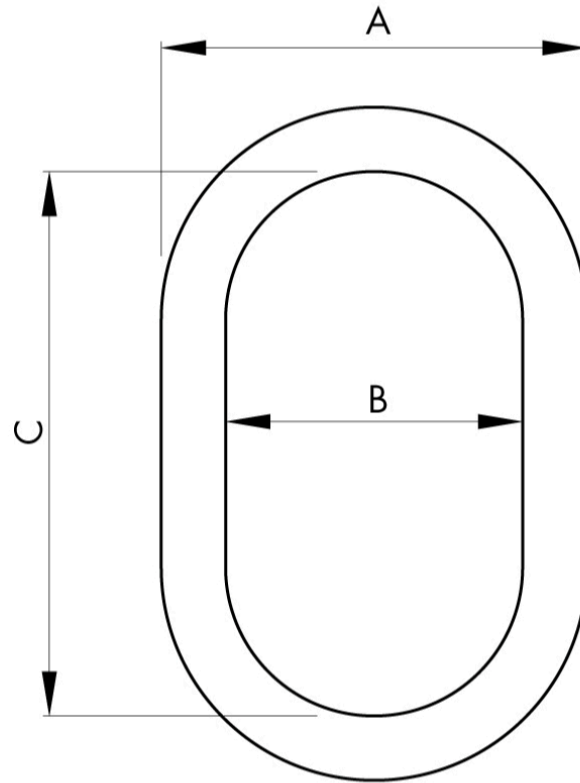
| MODEL | WEIGHT | A | B | C | D | E | F | G |
|---------|--------|-----|-----|-----|-----|-----|-----|-----|
| CS09T03 | 16 | 380 | 186 | 33 | 316 | 80 | 246 | 58 |
| CS09T06 | 17 | 380 | 186 | 33 | 316 | 80 | 246 | 58 |
| CS09T09 | 21 | 434 | 186 | 44 | 316 | 80 | 246 | 74 |
| CS09T12 | 26 | 451 | 186 | 52 | 316 | 100 | 270 | 83 |
| CS09T17 | 36 | 581 | 220 | 60 | 316 | 100 | 320 | 98 |
| CS09T25 | 55 | 705 | 290 | 73 | 316 | 100 | 400 | 127 |
| CS09T30 | 70 | 730 | 280 | 83 | 366 | 105 | 400 | 146 |
| CS09T50 | 137 | 955 | 370 | 105 | 445 | 130 | 540 | 184 |

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).


ACCESSORI OPZIONALI

| CODE | RANGE | A | B | C | D | H |
|-------|--------|-----|-------|-----|-----|-----|
| GG1T5 | 1,5 t | 49 | 138,5 | 46 | 210 | 32 |
| GG4 | 5 t | 60 | 174 | 60 | 275 | 40 |
| GG7 | 8 t | 76 | 211 | 75 | 335 | 59 |
| GG11 | 11,5 t | 72 | 252 | 90 | 400 | 65 |
| GG15 | 16 t | 89 | 280 | 90 | 440 | 76 |
| GG22 | 22 t | 111 | 365,5 | 116 | 580 | 90 |
| GG30 | 30 t | 116 | 417 | 135 | 660 | 115 |

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).


ACCESSORI OPZIONALI

| CODE | RANGE | A | B | C |
|------|-------|-----|-----|-----|
| CA2 | 2 t | 90 | 60 | 105 |
| CA4 | 5 t | 115 | 75 | 135 |
| CA8 | 8 t | 150 | 100 | 180 |
| CA15 | 18 t | 196 | 130 | 215 |
| CA30 | 32 t | 270 | 180 | 340 |
| CA40 | 40 t | 281 | 185 | 355 |

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).