

Technical specifications

PWS14320260215

The WWSERF platform is precise, robust and avoids the clutter of the connection cables between the platforms thanks to battery operation with a duration of up to 12 hours and warning in case of low battery. It has a weight indicator, a radio module, a polycarbonate waterproof keyboard with mechanical keys, transport wheels and non-slip vulcanized rubber applied below the platform for maximum grip on any type of surface. The dimensions of the WWSERF platform are 700x450 mm. The WWSERF platform is modular (small and large capacity) based on the field of use and has various functions including: tare and auto-off.


| | |
|---|--|
| Internal Resolution: | 1,500,000 points (input signal = 3 mV / V) |
| Visible resolution (in divisions): | > 800 000 |
| Temperature range: | -10 ÷ +40 ° C (at constant temperature) |
| Excitation voltage: | 5 Vdc ±5 %, 120mA (max 8 cells of 350 Ohm) |
| Power supply: | 6 Vdc with rechargeable battery (6V-4.5Ah) |
| Load cells material: | IP68 Stainless steel |
| Load cells connection: | 6 wires (CELL 1) with Remote Sense, 4-wire (CELL 2, 3, 4) without Remote Sense |
| Minimum voltage per division: | 0.3 micronV |
| Maximum input signal: | 6 mV/V |
| Power consumption: | 5 VA |
| Platform dimensions: | 700 x 561 mm, height 58 mm, weight 26 kg |
| Load plan: | 700 x 450 mm |



All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).



All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

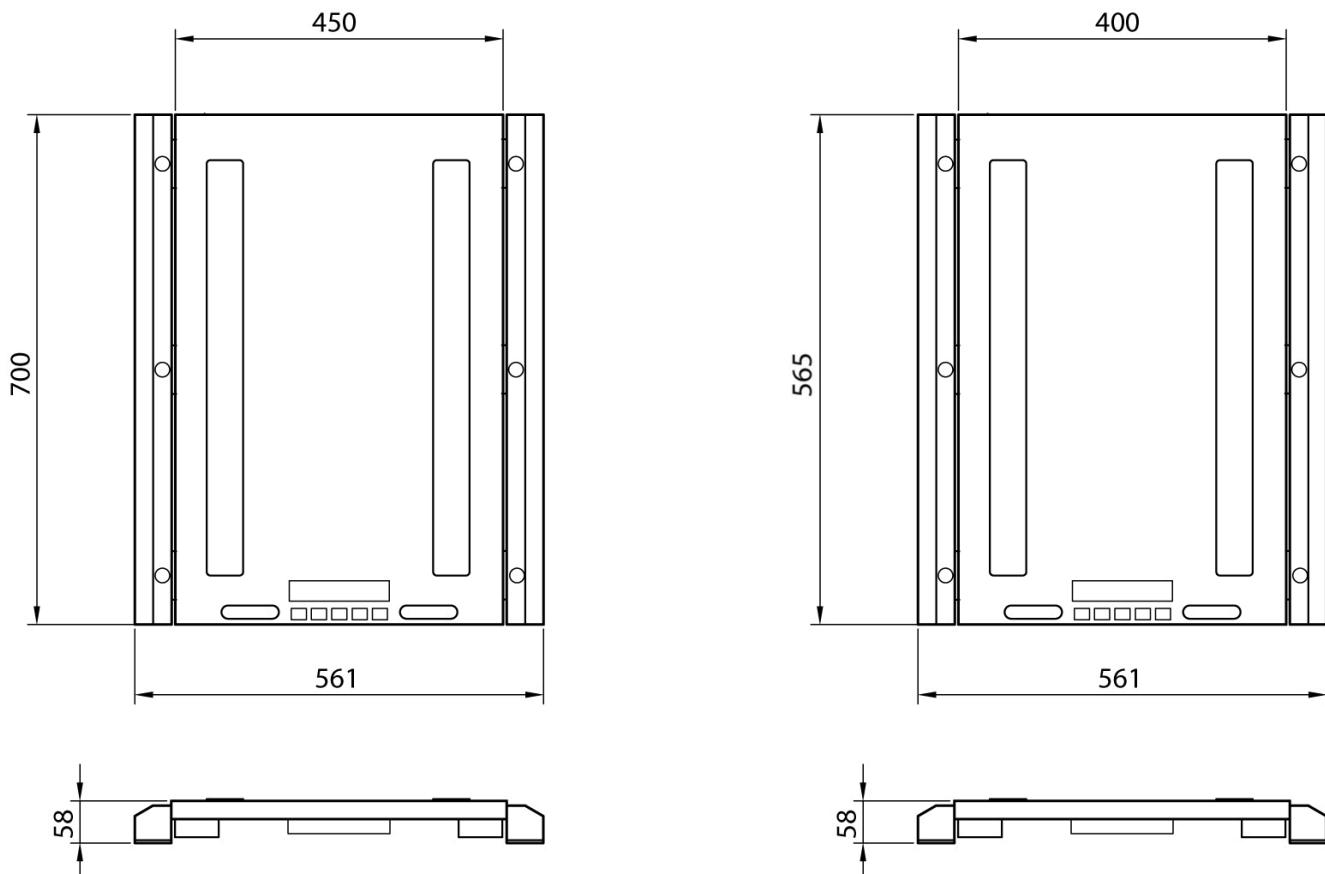

| MODEL | DIM. | CAPACITY (kg) | d (kg) | CE-M (kg) | d*HR (kg) |
|------------|---------|---------------|--------|-----------|-----------|
| WWSE6TRF | 700x450 | 6000 | 2 | -- | 0.2 |
| WWSE10TRF | 700x450 | 10000 | 5 | -- | 0.5 |
| WWSE15TRF | 700x450 | 15000 | 5 | -- | 0.5 |
| WWSE6TMRF | 700x450 | 6000 | -- | 2 | -- |
| WWSE10TMRF | 700x450 | 10000 | -- | 5 | -- |
| WWSE15TMRF | 700x450 | 15000 | -- | 5 | -- |

| MODEL | DIM. | CAPACITY (kg) | d (kg) | CE-M (kg) | d*HR (kg) |
|------------|------------|---------------|--------|-----------|-----------|
| WWSC1.5TRF | 565x400x58 | 1500 | 0.5 | 0.5 | 0.05 |
| WWSC3TRF | 565x400x58 | 3000 | 1 | 1 | 0.1 |
| WWSC6TRF | 565x400x58 | 6000 | 2 | 2 | 0.2 |
| WWSC10TRF | 565x400x58 | 10000 | 5 | 5 | 0.5 |
| WWSC15TRF | 565x400x58 | 15000 | 5 | 5 | 0.5 |

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).