


Technical specifications


PWS36420260511

The PMI product is a platform that can accommodate a single load cell; this allows to guarantee precise results even where the load is not precisely centered. The single cell weighing platform is the most widespread solution in many industrial and commercial applications. The PMI platform rests on 4 articulated feet and adjustable in height and has a connecting cable to the weight indicator with a standard length of 3 m. The PMI monocell paiffaforma adapts to the customer's needs and is available in other special versions.

| | |
|---------------------------------|------------|
| Rated load (RL): | 3 ÷ 300 Kg |
| Combined error: | 0.03 % RO |
| Safe overload: | 150 % RL |
| Trasducer input voltage: | 3 ÷ 15 Vdc |
| Rated output RO: | 2 mV/V |

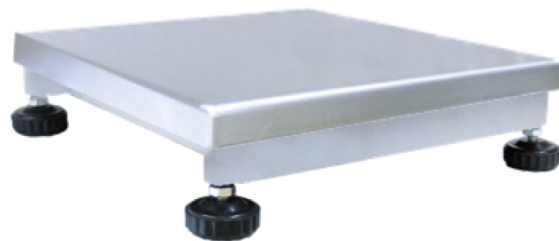

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

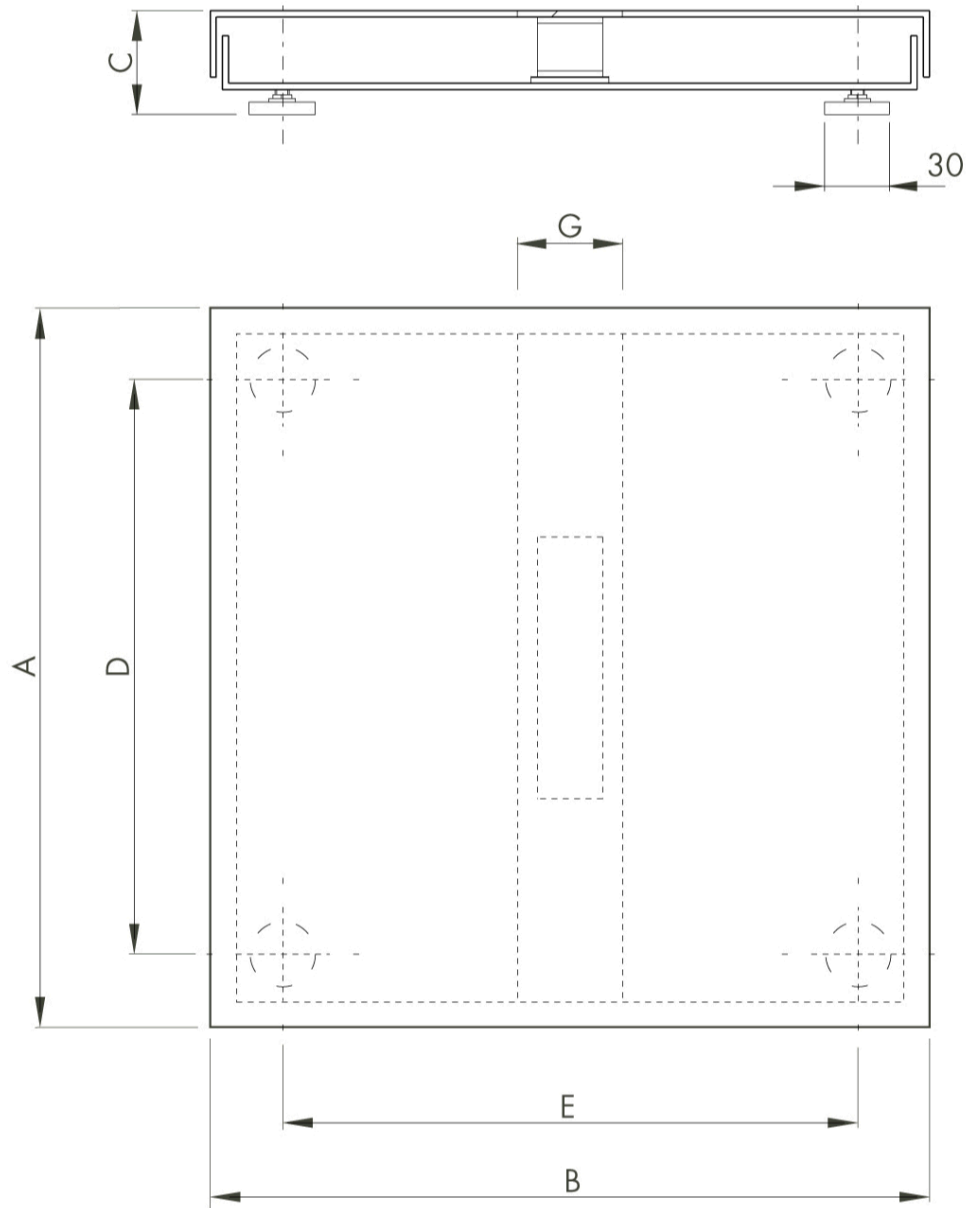

| MODEL | RATED LOAD (KG) | A | B | C | D | E | G |
|--------|-----------------|-----|-----|-----|-----|-----|----|
| PM 0/i | 3-6-15 | 200 | 200 | 60 | 150 | 150 | 50 |
| PM 1/i | 6-15-30 | 300 | 300 | 60 | 250 | 250 | 50 |
| PM 2/i | 15-30-60-150 | 400 | 400 | 120 | 340 | 327 | 50 |
| PM 3/i | 30-60-150 | 500 | 500 | 135 | 440 | 427 | 80 |
| PM 4/i | 60-150-300 | 600 | 600 | 135 | 540 | 527 | 80 |
| PM 5/i | 60-150-300 | 700 | 700 | 135 | 640 | 627 | 80 |
| PM 6/i | 60-150-300 | 800 | 800 | 135 | 740 | 727 | 80 |

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).