

General information

PWS22220260215

The weight indicator MC 302 Ethernet satisfies various needs in the weighing field, from the management of level thresholds to the dosage. It has an optional fiscal memory up to 160,000 weighs and it is able to store 50 different recipes that can be printed automatically. The weight indicator MC 302 Ethernet has upload and download function for programming using TESTER 1008 and can be customized according to customer needs.



User Manual: [mc-302_user_manual.pdf](#)

Installation Manual: [mc-302_installation_manual.pdf](#)





All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Technical specifications

PWS22220260215

| | |
|---|--|
| Legal for Trade: | certification available on request |
| Measuring range: | -3.9 ÷ +3.9 mV/V |
| Input sensitivity: | 0.02 μ V/count |
| Full scale non-Linearity: | <0.01% |
| Gain drift: | < 0.0003% FS/°C |
| A/D Converter: | 24 bit |
| Internal Resolution: | > 16.000.000 points |
| Trasducer input voltage: | 5 V (max 8 load cells 350 Ohm in parallel) |
| Visible resolution (in divisions): | 600000 |
| Divisions value (adjustable): | x1, x2, x5 |
| Decimal figures range: | 0 ÷ 4 |
| Temperature range: | -10 ÷ +50°C (max umidity 85% without condensation) |
| Storage temperature: | -20 ÷ +70°C |
| Filter: | 0.2 ÷ 50 Hz. 100 Hz during dosage |
| Logic output: | 6 relays (NA) max 115 Vac /30 Vdc 0.5 A cad. |
| Logic inputs: | 8 optoisolated 12 / 24 Vdc PNP |
| Serial port: | COM1: RS232 half duplex COM2: RS422/RS485 half duplex |
| Power supply: | 12 ÷ 24 Vdc -10% +15%, 15 VA |
| Regulatory compliance: | EN45501 for Metrological Norms EN50081-1 and EN50082-2 EMC EN61010-1 for Electrical Safety |
| Baud rate: | 1200 ÷ 115200 adjustable |
| Transmission distance: | 15m (RS232C), 1000m (RS422; RS485) |
| Fieldbus: | Ethernet, ASCII, Modbus RTU |
| Power consumption: | 230 Vac ±10% - 50/60 Hz absorbed power 7 VA (115 Vac on demand) |
| Weighing optional memory: | > 160.000 weighed |

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).

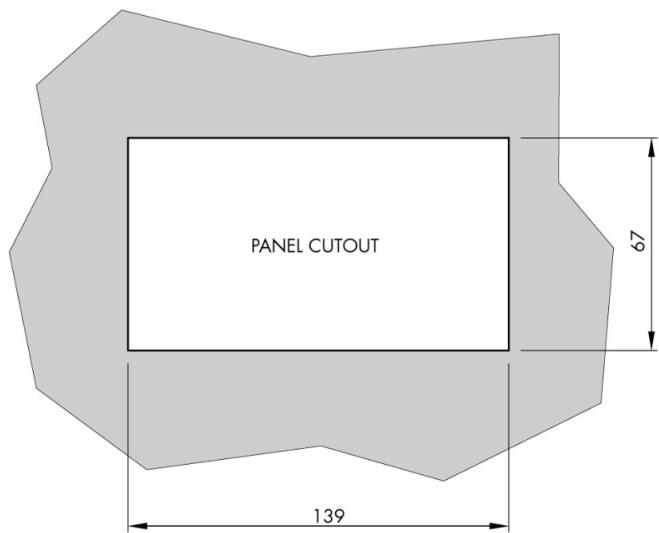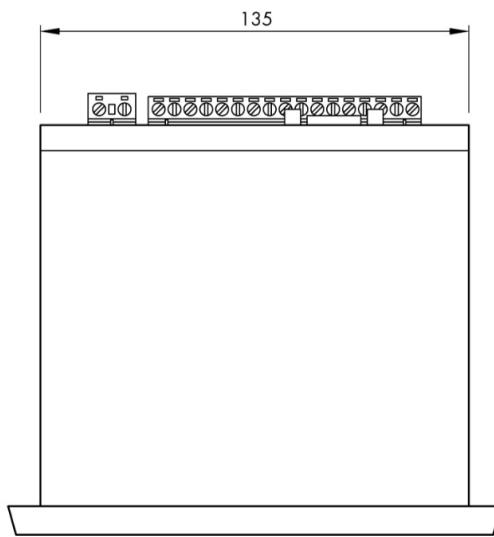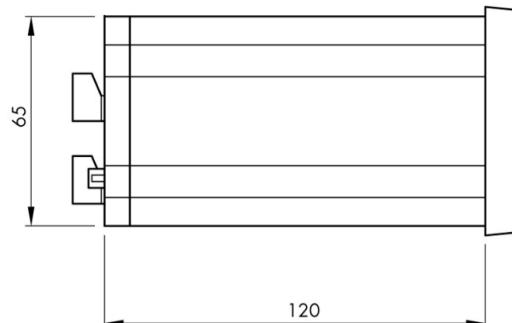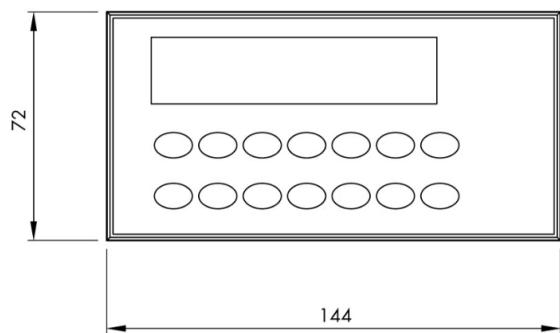

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).