Weight Transmitter **DAT 200 Ethernet**

available with certification • UL

General information

PWS20320261105

The weight transmitter DAT 200 Ethernet has high performance and long-term reliability. The configuration and calibration can be set up directly from the front panel. The small width dimensions allow to place a large number of transmitters inside the electrical automation panels. The weight transmitter DAT 200 Ethernet has an interface with intrinsically safe barriers for use in hazardous areas. The weight transmitter DAT 200 Ethernet can be customized according to customer needs. It has two red status LEDs, 3 mechanical buttons behind the red door and screw terminal blocks.



Technical Manual: dat_200_ethernet_technical_manual_en.pdf

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

PAVONE SISTEMI S.R.L.
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
T (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963

Technical specifications

PWS20320261105

Measuring range:	–4 ÷ +4 mV/V
Input sensitivity:	0.02 µV/count
Full scale non-Linearity:	<0.01%
Gain drift:	< 0.001% FS/°C
Display:	5 digit, red LED (7 segments), h 7 mm
A/D Converter:	24 bit
Internal Resolution:	16.000.000 points
Trasducer input voltage:	4 V (max 4 cells 350 Ohm)
Visible resolution (in divisions):	99999
Divisions value (adjustable):	0.001 ÷ 50
Temperature range:	-10 ÷ +50°C (max umidity 85% without condensation)
Storage temperature:	-20 ÷ +60 °C
Filter:	0.02 ÷ 25 Hz
Serial port:	RS232C half duplex with ASCII protocol
Power supply:	24 Vcc ±10% – power 2 W
Regulatory compliance:	EN61000-6-2, EN61000-6-3 for EMC; EN61010-1 for electrical security
Fieldbus:	Ethernet 10/100 with protocols TCP, Modbus/TCP, IP
Baud rate:	2400 ÷ 115200 adjustable
Transmission distance:	15 m
Buffer dimensions:	128 byte IN - 128 byte OUT


All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).


Weight Transmitter **DAT 200 Ethernet**

available with certification • UL





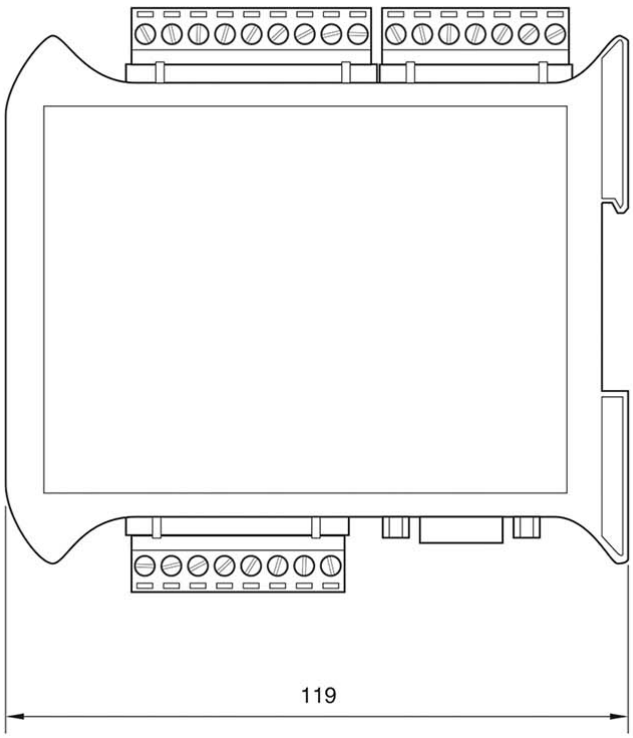

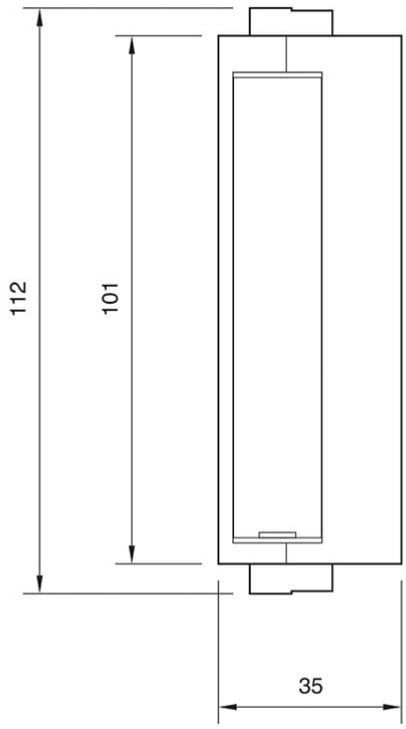

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

PAVONE SISTEMI S.R.L.
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
T (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963