

## General information

PWS20520250823

The DAT 400 Analog weight transmitter is an exclusive product of Pavone Systems that guarantees high performance and reliability. It has an upload and download function for programming with Tester 1008. Configuration and calibration can be set up from the front panel or from a PC via the USB port. The bipolar option is available on request. The DAT 400 Analog weight transmitter can be customized according to customer needs. It has a peak hold function for dynamic measures and screw terminal blocks.



Software Innovation 2: [innovation\\_2\\_weighing\\_software.zip](#)

Technical Manual: [dat-400\\_en.pdf](#)

Technical Manual: [dat-400\\_analog\\_en.pdf](#)

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications




PWS20520250823

<b>Measuring range:</b>	-0.5 ÷ +3.5 mV/V (-3.9 ÷ +3.9 mV/V optional)
<b>Input sensitivity:</b>	0.02 µV/count
<b>Full scale non-Linearity:</b>	<0.01%
<b>Gain drift:</b>	< 0.001% FS/°C
<b>Display:</b>	6 digit, red LED (7 segments), h 14 mm
<b>A/D Converter:</b>	24 bit
<b>Internal Resolution:</b>	> 16.000.000 points
<b>Transducer input voltage:</b>	5 V (max 6 load cells 350 Ohm)
<b>Visible resolution (in divisions):</b>	60000
<b>Divisions value (adjustable):</b>	x1, x2, x5
<b>Decimal figures range:</b>	0 ÷ 3
<b>Temperature range:</b>	-10 ÷ +50°C (max umidity 85% without condensation)
<b>Storage temperature:</b>	-20 ÷ +70 °C
<b>Filter:</b>	0.1 ÷ 25 Hz
<b>Logic output:</b>	2 Solid-state relays, (maximum load 24 Vdc / 100 mA each)
<b>Logic inputs:</b>	2 optoisolated 24 Vcc PNP (External voltage)
<b>Serial port:</b>	Nr. 2 - USB/RS232C, RS485 with ASCII or Modbus RTU protocols
<b>Power supply:</b>	24 Vcc ±15% - power 5 W
<b>Regulatory compliance:</b>	EN61326-1, EN55011, EN55014 for EMC; EN61010-1 for electrical security
<b>Baud rate:</b>	2400, 9600, 19200, 38400, 115200 adjustable (RS232)
<b>Transmission distance:</b>	15m (RS232C), 1000m (RS422; RS485)
<b>Analog output:</b>	optoisolated 16 Bit Tension: 0÷5/10 V (R min10 K Ohm), Current: 0/4÷20 mA (R max 300 Ohm)
<b>Dimensions and weight:</b>	106 x 90 x 58 mm (L x H x P); 250 g

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

# Weight Transmitter DAT 400 Analog

available with certification • UL • GOST • EAC • OIML

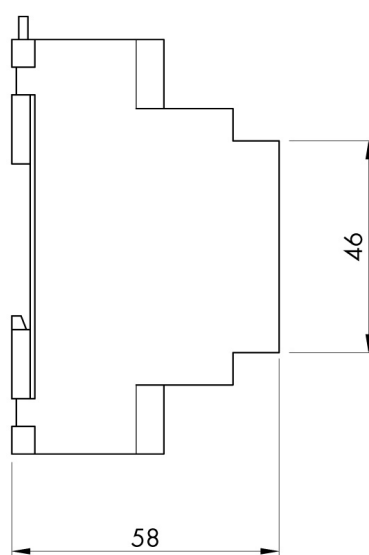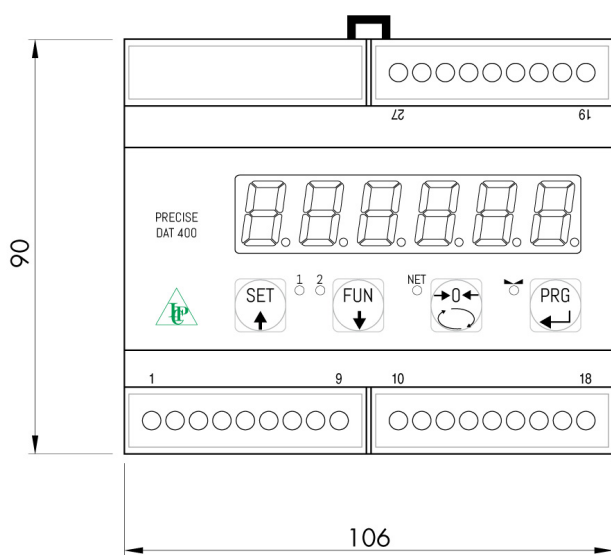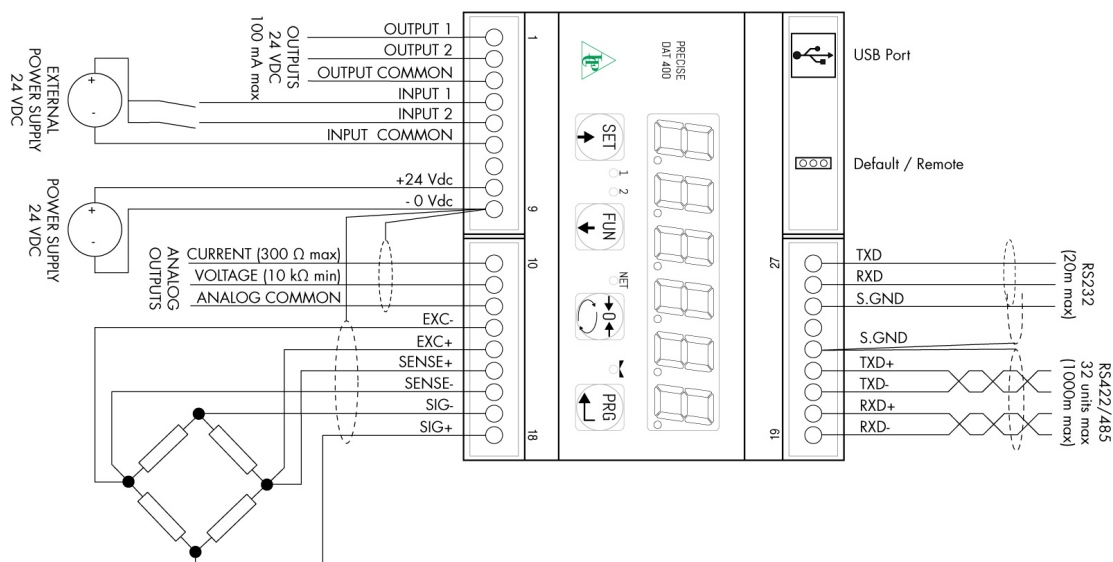

All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).