

## General information

PWS22820260215

The DAT 500 Devicenet weight transmitter has high performance and reliability and It has the upload and download function for the programming with TESTER 1008. The DAT 500/DEVICENET can be connected through the external converter and the configuration and calibration can be set up from the front panel or from the PC with the Inovation™ program (MS WINDOWS). The weight transmitter DAT 500 Devicenet has a Peak Hold function for dynamic weighings and screw terminal blocks.



Software Inovation 2: [inovation\\_2\\_weighing\\_software.zip](#)

Devicenet EDS file: [dat\\_400\\_500\\_devicenet\\_eds.zip](#)

Technical Manual: [dat-500\\_en.pdf](#)

Technical Manual: [dat-500\\_fieldbus\\_en.pdf](#)






All indicated data may be changed without notice.  
All the measures indicated are expressed in millimeters (mm).

## Technical specifications

PWS22820260215

<b>Measuring range:</b>	-0.5 ÷ +3.5 mV/V (-3.9 ÷ +3.9 mV/V optional)
<b>Input sensitivity:</b>	0.02 $\mu$ V/count
<b>Full scale non-Linearity:</b>	<0.01%
<b>Gain drift:</b>	<0.001% FS/°C
<b>Display:</b>	6 digit, red LED (7 segments), h 14 mm
<b>A/D Converter:</b>	24 bit
<b>Internal Resolution:</b>	> 16.000.000 points
<b>Trasducer input voltage:</b>	5 V (max 6 load cells 350 Ohm)
<b>Visible resolution (in divisions):</b>	60000
<b>Divisions value (adjustable):</b>	x1, x2, x5
<b>Decimal figures range:</b>	0 ÷ 3
<b>Temperature range:</b>	-10 ÷ +50°C (max umidity 85% without condensation)
<b>Storage temperature:</b>	-20 ÷ +70 °C
<b>Filter:</b>	0.1 ÷ 25 Hz
<b>Logic output:</b>	2 Solid-state relays, (maximum load 24 Vdc / 100 mA each)
<b>Logic inputs:</b>	2 optoisolated 24 Vcc PNP (External voltage)
<b>Serial port:</b>	RS232C with ASCII or Modbus RTU protocols
<b>Power supply:</b>	24 Vcc $\pm$ 15% - power 5 W
<b>Regulatory compliance:</b>	EN61326-1, EN55011, EN55014 for EMC; EN61010-1 for electrical security
<b>Fieldbus:</b>	Devicenet
<b>Dimensions and weight:</b>	96 x 48 x 120 mm (L x H x D); 250 g
<b>Baud rate:</b>	2400, 9600, 19200, 38400, 115200 adjustable
<b>Transmission distance:</b>	15m (RS232C)

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).

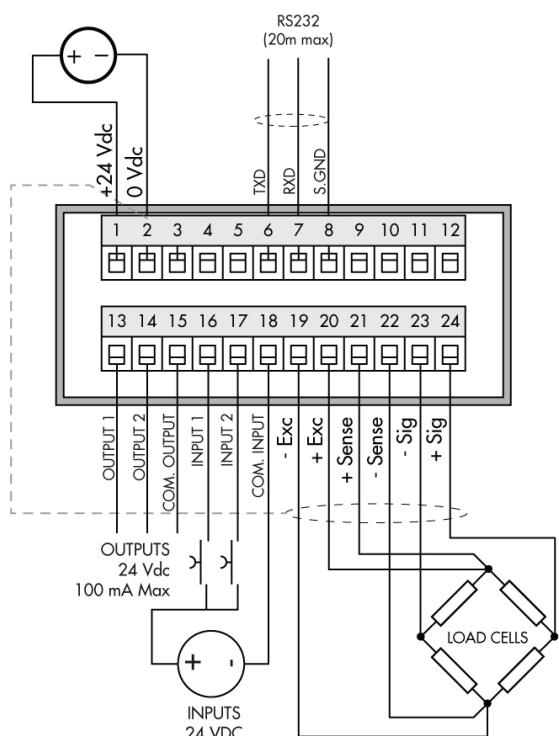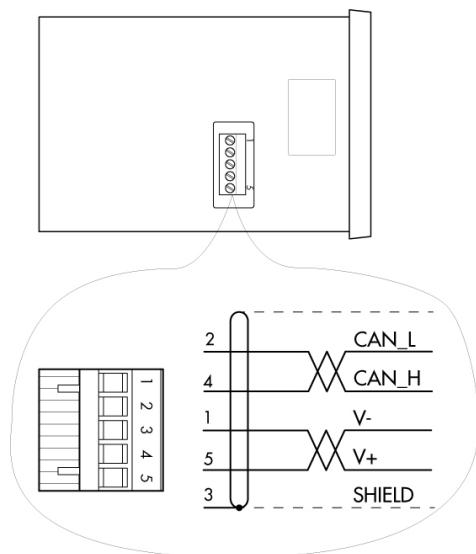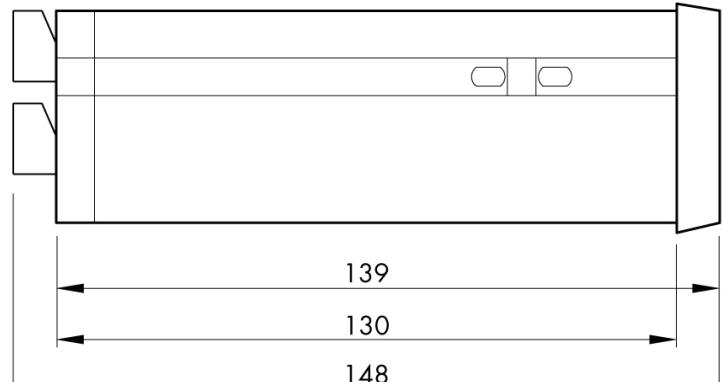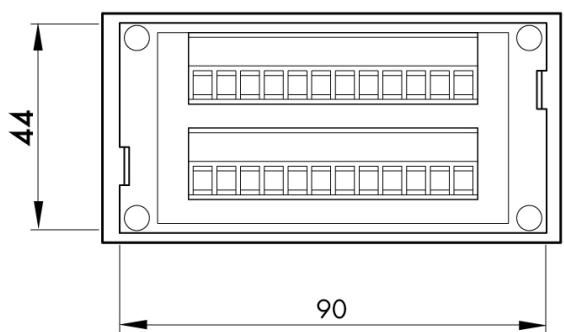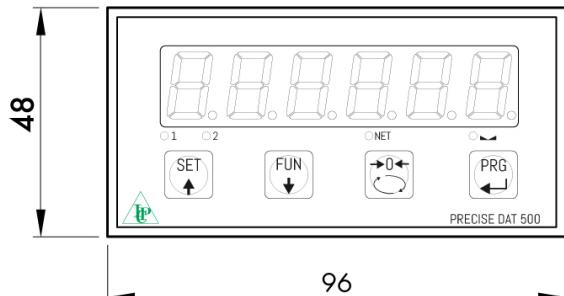

All indicated data may be changed without notice.  
 All the measures indicated are expressed in millimeters (mm).