# General information

PWS5720261105

The DAT 500 weight transmitter guarantees high performance and long-term reliability. It is equipped with several optionals: upload and download functions for programming with TESTER 1008, the connection can occur through the external converter and configuration and calibration can be done either from the front panel or from a PC. The weight transmitter DAT 500 has a Peak Hold function for dynamic weighings and screw terminal blocks.




Software Inovation 2: inovation_2_weighing_software.zip

Technical Manual: dat-500_en.pdf

Technical Manual: dat-500_analog_en.pdf

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

**PAVONE SISTEMI S.R.L.**
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
**T** (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963

# Technical specifications

PWS5720261105

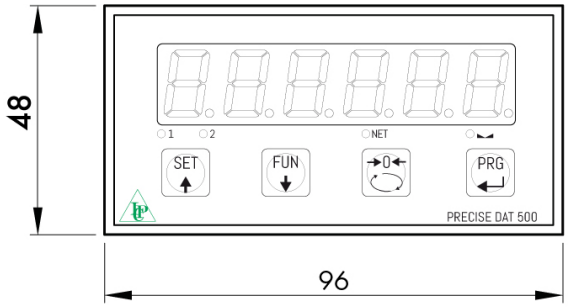
| | |
|---|---|
| **Measuring range:** | -0.5÷+3..5 mV/V (-3.9÷+3.9 mV/V optional) |
| **Input sensitivity:** | 0.02 µV/count |
| **Full scale non-Linearity:** | < 0.01% |
| **Gain drift:** | <0.001% FS/°C |
| **Display:** | 6 digit, red LED (7 segments), h 14 mm |
| **A/D Converter:** | 24 bit |
| **Internal Resolution:** | > 16.000.000 points |
| **Trasducer input voltage:** | 5 V (max 6 load cells 350 Ohm) |
| **Visible resolution (in divisions):** | 60000 |
| **Divisions value (adjustable):** | x1, x2, x5 |
| **Decimal figures range:** | 0 ÷ 3 |
| **Temperature range:** | -10 ÷ +50°C (max umidity 85% without condensation) |
| **Storage temperature:** | -20 ÷ +70 °C |
| **Filter:** | 0.1 ÷ 25 Hz |
| **Logic output:** | 2 Solid-state relays, (maximum load 24 Vdc / 100 mA each) |
| **Logic inputs:** | 2 optoisolated 24 V c.c. PNP (External voltage) |
| **Serial port:** | RS232C or RS422/RS485 with ASCII or Modbus RTU protocols |
| **Power supply:** | 24 Vcc ±15% - power 5 W |
| **Regulatory compliance:** | EN61326-1, EN55011, EN55014 for EMC; EN61010-1 for electrical security |
| **Dimensions and weight:** | 96 x 48 x 120 mm (L x H x D); 250 g |
| **Baud rate:** | 2400, 9600, 19200, 38400, 115200 adjustable |
| **Transmission distance:** | 15m (RS232C), 1000m (RS422; RS485) |
| **Bipolar optional output:** | ±10V |

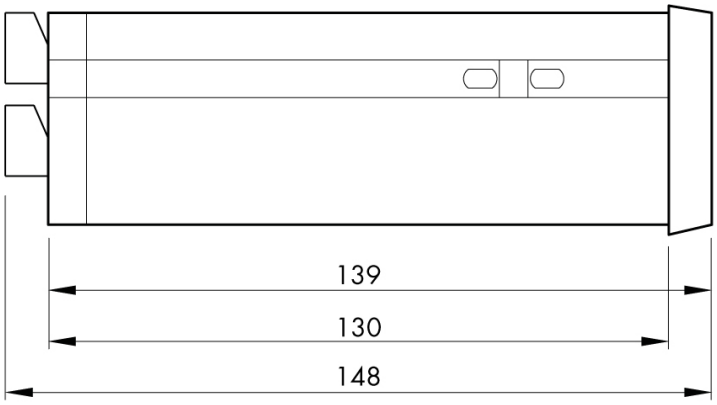
All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

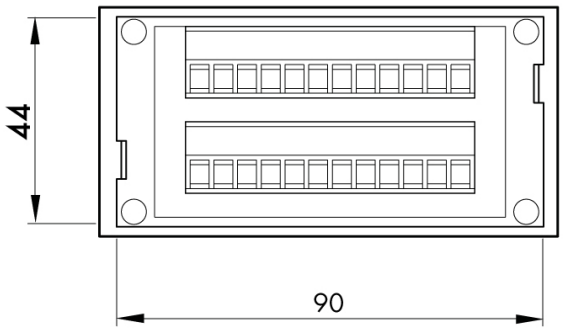
**PAVONE SISTEMI S.R.L.**
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
**T** (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963

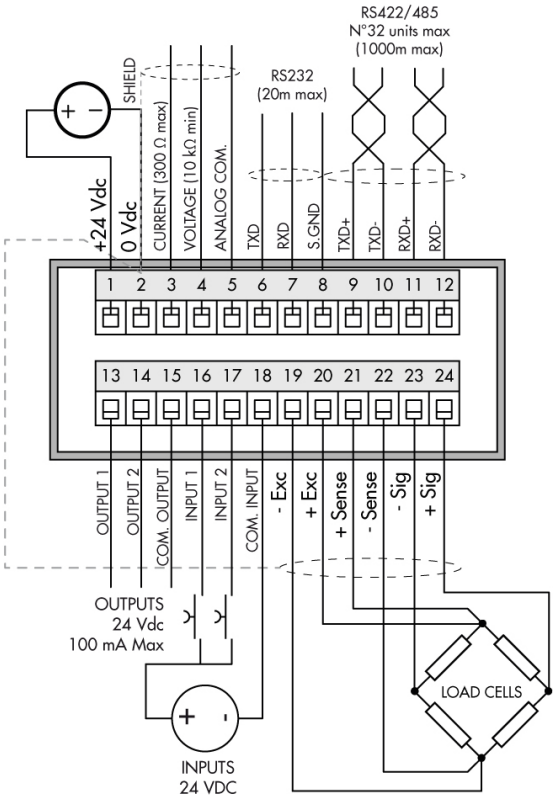
# Weight Transmitter **DAT 500**

available with certification • UL • GOST • OIML




All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

**PAVONE SISTEMI S.R.L.**
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
**T** (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963