Weight Transmitter **UWT 6008 Analog + Profinet**

General information

PWS31820261105

The UWT 6008 Analog + Profinet weight transmitter has been designed by Pavone Systems. This weight trasnsmitter is a unique product since it is suitable to all industrial applications where it is necessary to know the load distribution on the different cells. The UWT 6008 Analog + Profinet is able to monitor all load cells and generate alarms due to excessive cell signal drift, missing connections, failures in load cells and unbalanced weight distribution. The emulative control allows the weighing system to work even when a load cell is broken, until its replacement. The Software Optimation is given for free. This Software allows you to run certain activities such as calibration or monitoring directly from your computer. The Optimation software is provided by Pavone Systems and guarantees a perfect instrument run.



Software Optimation 1.11.22: optimation_weighing_software.zip

Technical Manual: uwt-6008_technical_manual.pdf

Profinet GSD file (NIC50): profinet_nic50_gsd.zip

Profinet GSD file (NETX90): profinet_netx90_gsd.zip

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

PAVONE SISTEMI S.R.L.
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
T (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963


Technical specifications


PWS31820261105


Measuring range:	-3.9 ÷ +3.9 mV/V
Input sensitivity:	0.02 µV/count
Full scale non-Linearity:	<0.01%
Gain drift:	< 0.001% FS/°C
Display:	128 x 64-pixel graphic LCD
A/D Converter:	24 bits
Internal Resolution:	> of 16,000,000 points
Trasducer input voltage:	5 Vdc (230 mA max.)
Frequency signal acquisition:	12,5 ÷ 300 Hz
Visible resolution (in divisions):	999999
Divisions value (adjustable):	x1, x2, x5, x10, x20, x50
Decimal figures range:	0 ÷ 4
Temperature range:	-10 ÷ + 50°C (max. humidity: 85% without condensation)
Storage temperature:	-20 ÷ +70°C
Filter:	5 ÷ 250 Hz
Logic output:	2 relays, Max. 48 Vac/Vdc, 2A each
Logic inputs:	2 opto-isolated at 12/24 Vdc PNP (external power supply)
Serial port:	1 USB device + 1 RS232C + 1 RS485
Analog output Non-Linearity:	< 0,02%
Temperature drift analog output:	0,001% FS / °C
Power supply:	12-24 Vdc ±15% - power consumption 4 W
Microcontroller:	ARM Cortex M0+ at 32 bits, 256KB Flash reprogrammable on-board from USB
Data storage:	64 Kbytes expandable up to 1024 Kbytes
Regulatory compliance:	EN61000-6-2, EN61000-6-3 for EMC; EN61010-1 for Electrical Safety, EN45501 for metrology
Number of load cells:	1 ÷ 8
Dimensions:	100 x 75 x 110 mm (L x H x P)

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Weight Transmitter **UWT 6008 Analog + Profinet**

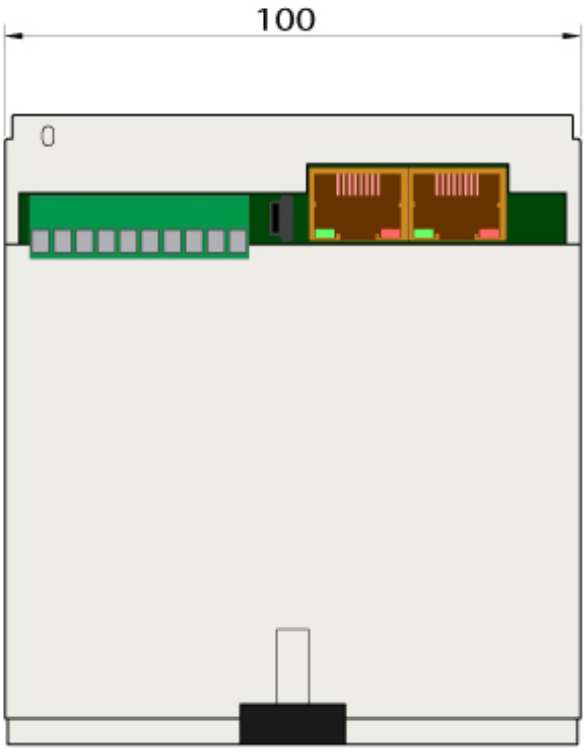

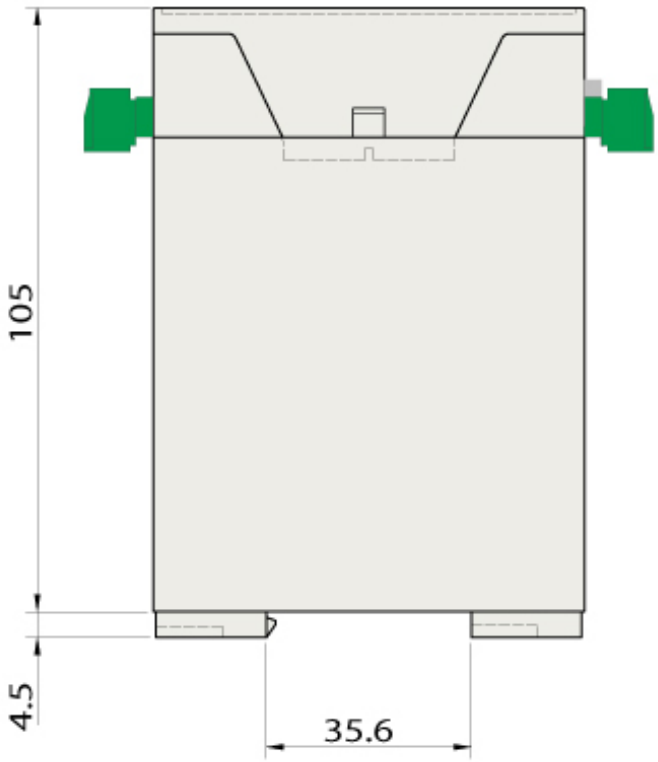

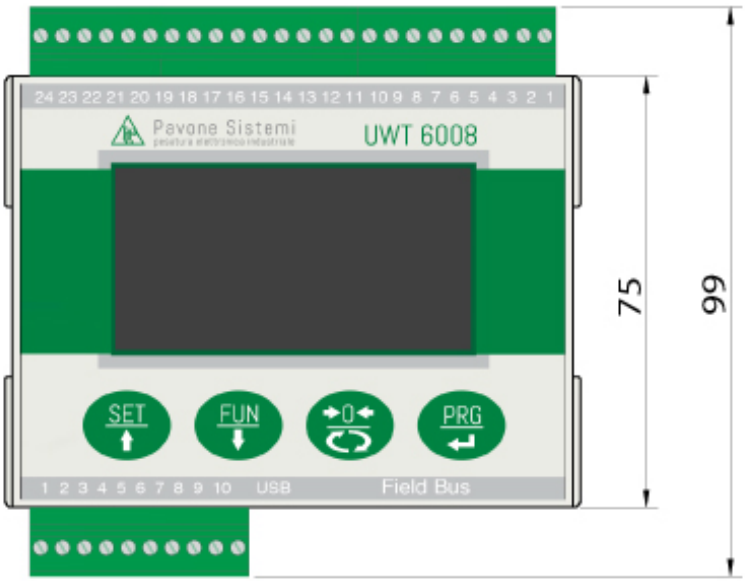

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

PAVONE SISTEMI S.R.L.
Via Tiberio Bianchi 11/13/15, 20863 Concorezzo (MB), Milan, Italy
T (+39) 039 9162656 **F** (+39) 039 9162675 **W** pavonesistemi.com
Industrial Electronic Weighing Systems since 1963