


Technical specifications


PWS6020260508

Measuring range:	-1.5 ÷ +3.5 mV/V
Input sensitivity:	0.02 µV/count
Full scale non-Linearity:	±0.01%
Gain drift:	± 0.001% FS/°C
Display:	Alphanumeric backlit LCD, 2 lines and 16 scripts
A/D Converter:	24 bit
Internal Resolution:	> 16.000.000 counts
Trasducer input voltage:	5 V (max 6 load cells 350 Ohm)
Visible resolution (in divisions):	600000
Divisions value (adjustable):	x1, x2, x5
Decimal figures range:	0 ÷ 3
Temperature range:	-10 ÷ +50°C (max umidity 85% without condensation)
Storage temperature:	-20 ÷ +70°C
Filter:	0.1 ÷ 25 Hz
Logic output:	2 outputs (NA) - 115 Vca/30 Vcc, 0.5 A
Logic inputs:	2 optoisolated 24 V cc PNP
Serial port:	COM1: RS232 COM2: RS422/RS485
Power supply:	24 Vcc ±15% - 12 W
Regulatory compliance:	EN61000, EN61000 for EMC; EN61010-1 for electrical safety
Baud rate:	1200 ÷ 115200 adjustable
Transmission distance:	15m (RS232C), 1000m (RS422; RS485)
Dimensions:	100 x 75 x 110 mm (L x H x D)
Fieldbus:	ASCII, Modbus RTU, Profibus, Devicenet, Ethernet (optional)

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).

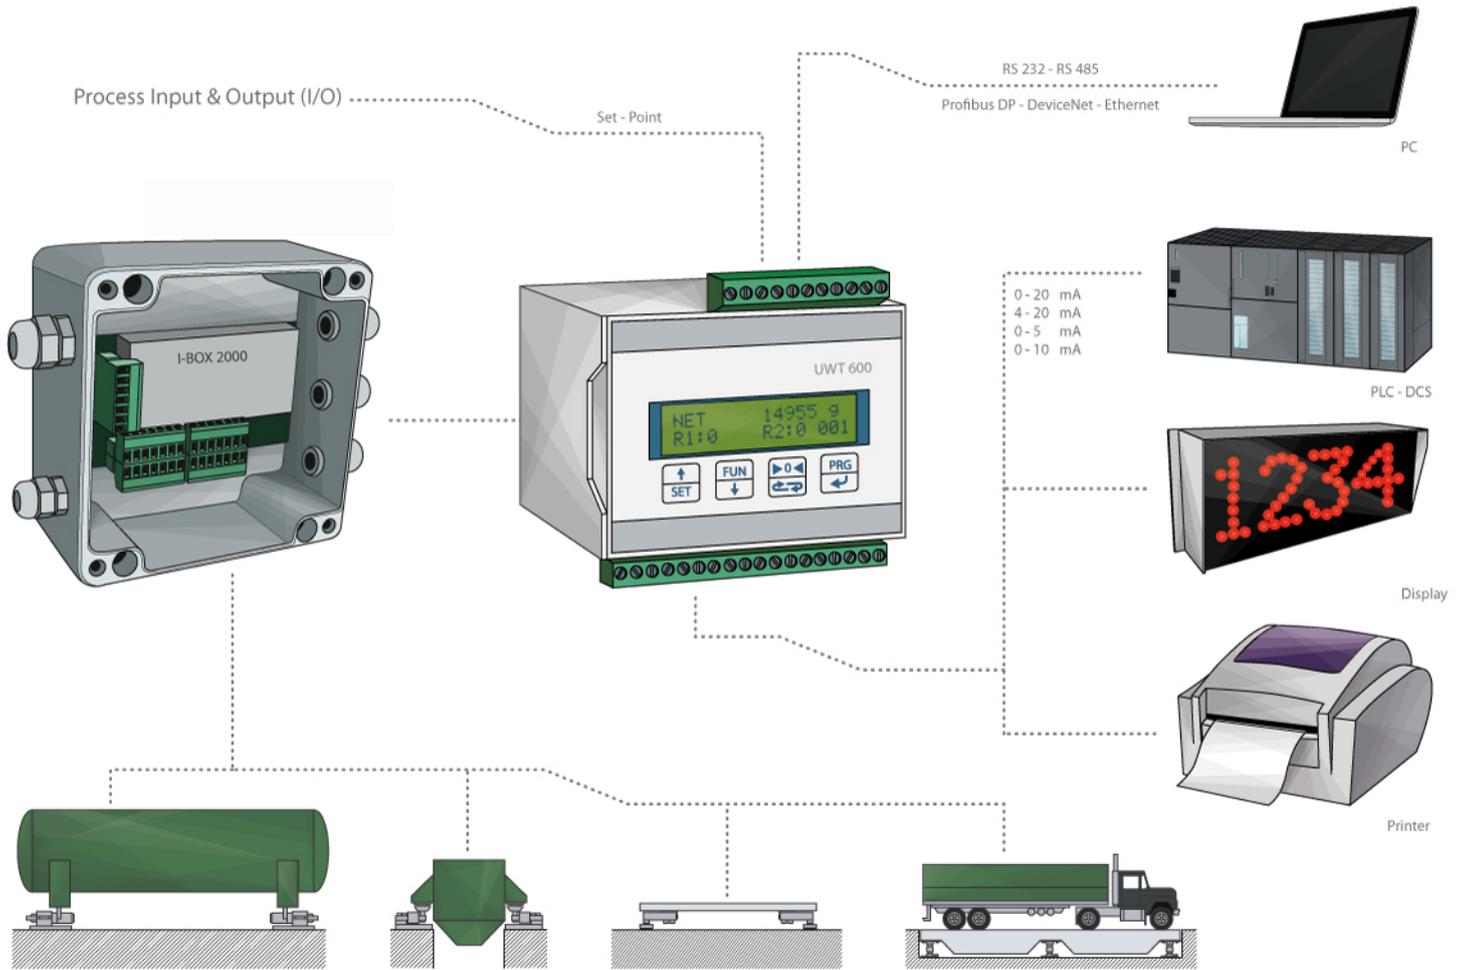

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).

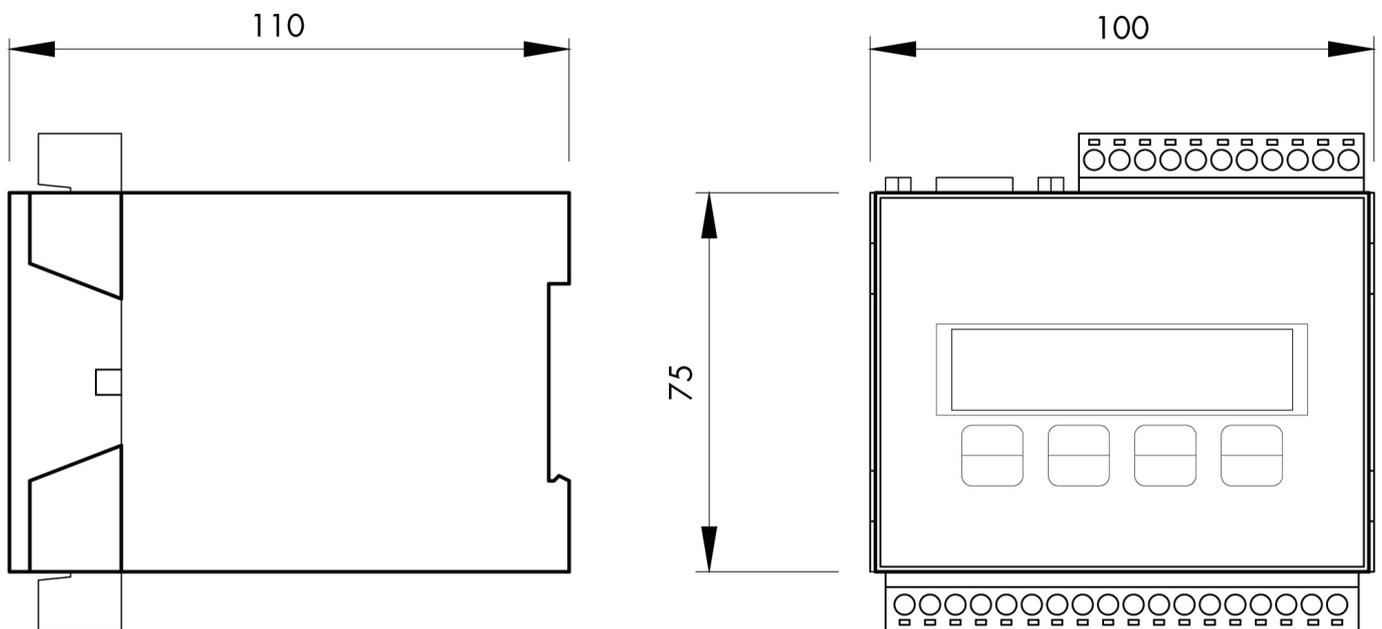

All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).